

Peiline®



粵粵智能流体科技
ShenShen Intelligent Fluid Technology

标准式样 CBI
standard style



CB103 06 09 12 16 25

插座与插头/Sockets and plugs



CBI

技术特点/technical characteristics

型号/Model	CB103	CB106	CB109	CB112	CB116	CB125
通径/Bore diameter	3	6	9	12	16	25
最高工作压力/Max. working pressure (bar)	50	50	50	50	50	50

工作温度/Working temperatures


流量类型 Type of flow	密封材质 Seal Material	工作温度 Working temperatures
冷水、热水、液压油和矿物油 Cold or hot water, hydraulic and mineral oils Mineral heat transfer oil	丁腈 Nitrile (NBR)	-15 to +100 °C
矿物传热油 Mineral heat transfer oil	氟碳化合物 Fluorocarbon (FKM)	-10 to +150 °C
合成传热油 Sthetic heat transfer oil	氟碳化合物 Fluorocarbon (FKM)	-10 to +200 °C
	全氟橡胶 Perfluoroelastomer (FFKM)	0 to +250 °C
乙二醇水 Glycol water	三元乙丙橡胶 Ethylene-Propylene (EPDM)	-20 to +150 °C
热水和蒸汽 Hot water and steam	三元乙丙橡胶 Ethylene-Propylene (EPDM)	-20 to +200 °C

其他温度，请咨询我们

For other temperatures, consult us

内螺纹插座 Inner thread sockets

CBI

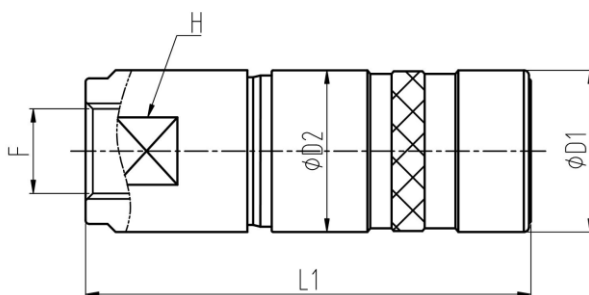


型号 Mould	尺寸 Dimensions(mm)					零件号 Part-number
	F	ΦD1	ΦD2	L1	H	
CBI03	G1/8	15	17	48.5	13	CBI03.1100/IA
	NPT1/8	15	17	48.5	13	CBI03.1200/IA
CBI06	G1/4	22		61	20	CBI06.1101/IA
	G3/8	22		65	20	CBI06.1102/IA
	NPT1/4	22		61	20	CBI06.1201/IA
	R1/4	22		61	20	CBI06.1111/IA
CBI09	G3/8	30.5		75.5	24	CBI09.1102/IA
	NPT3/8	30.5		75.5	24	CBI09.1202/IA
	G1/2	30.5		79	24	CBI09.1103/IA
	NPT1/2	30.5		79	24	CBI09.1203/IA
CBI12	G1/2	41	44	103	27	CBI12.1103/IA
	NPT1/2	41	44	103	27	CBI12.1203/IA
CBI16	G3/4	53	53	129.5	36	CBI16.1104/IA
	NPT3/4	53	53	129.5	36	CBI16.1204/IA
CBI25	G1	66.5		148	55	CBI25.1105/IA
	G1 1/4	66.5		141	55	CBI25.1106/IA
	NPT1	66.5		148	55	CBI25.1205/IA
	NPT1 1/4	66.5		141	55	CBI25.1206/IA

内螺纹插座 Inner thread sockets



CBI

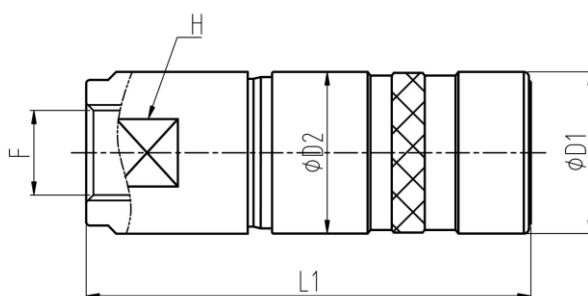


型号 Mould	尺寸 Dimensions(mm)					零件号 Part-number
	F	ΦD1	ΦD2	L1	H	
CBI03	G1/8	15	17	48.5	13	CBI03.1100/IA/BF
	NPT1/8	15	17	48.5	13	CBI03.1200/IA/BF
CBI06	G1/4	22		61	20	CBI06.1101/IA/BF
	G3/8	22		65	20	CBI06.1102/IA/BF
	NPT1/4	22		61	20	CBI06.1201/IA/BF
CBI09	G3/8	30.5		75.5	24	CBI09.1102/IA/BF
	NPT3/8	30.5		75.5	24	CBI09.1202/IA/BF
CBI12	G1/2	41	44	103	27	CBI12.1103/IA/BF
	NPT1/2	41	44	103	27	CBI12.1203/IA/BF
CBI16	G3/4	53	53	129.5	36	CBI16.1104/IA/BF
	NPT3/4	53	53	129.5	36	CBI16.1204/IA/BF

注：/BF 代表全不锈钢

Note: /BF stands for all stainless steel

90°内螺纹插座
90°Inner thread sockets

CBI

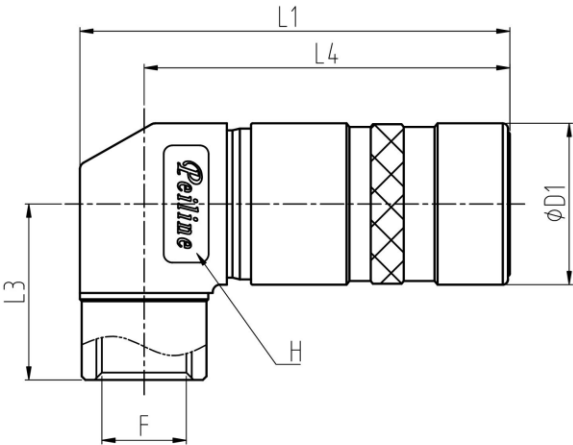


型号 Mould	尺寸 Dimensions(mm)						零件号 Part-number
	F	ØD1	L1	L3	L4	H	
CBI06	G1/4	22	56.5	25	48	22	CBI06.1101/IA/RE
	NPT1/4	22	56.5	24.5	48	22	CBI06.1201/IA/RE
CBI09	G3/8	30.5	99.6	28	88.5	24	CBI09.1102/IA/RE

外螺纹插座 External thread sockets



CBI

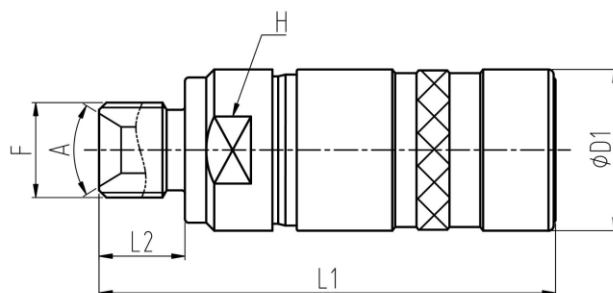


型号 Mould	尺寸 Dimensions(mm)					零件号 Part-number
	F/A	ΦD1	L1	L2	H	
CBI06	G1/4 60°锥	22	61.5	11	20	CBI06.1151/IA
	G3/8 60°锥	22	61	12	21	CBI06.1152/IA
	M16×1.5 24°锥 连接10mm内径软管	22	59	11	20	CBI06.1416/IA
CBI09	G3/8 60°锥	30.5	82	12	24	CBI09.1152/IA
	G1/2 60°锥	30.5	84	14	24	CBI09.1153/IA
CBI16	G3/4	53	134	16	36	CBI16.1154/IA
CBI25	NPT1 1/4	66.5	135	22.5	55	CBI25.1256/IA
CBI06	G1/4 60°锥	22	135	11	20	CBI06.1151/IA/BF
CBI09	G3/8 60°锥	30.5		12	24	CBI09.1152/IA/BF

注：/BF 代表全不锈钢

Note: /BF stands for all stainless steel


90°外螺纹插座
90°External thread sockets

CBI

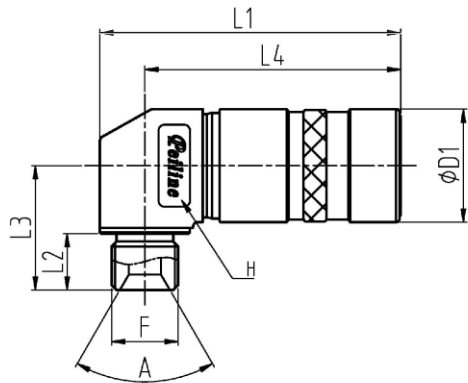


型号 Mould	尺寸 Dimensions(mm)							零件号 Part-number
	F/A	ΦD1	L1	L2	L3	L4	H	
CBI06	G1/4 60°锥	22	56.5	11	44	48	22	CBI06.1151/IA/RE
	G3/8 60°锥	22	56.5	11	24.5	48	22	CBI06.1152/IA/RE
	M16×1.5 24°锥 连接10mm内径软管	22	56.5	11	24	48	22	CBI06.1416/IA/RE
CBI09	G3/8 60°锥	30.5	56.5	12	38	88.5	21	CBI09.1152/IA/RE

90° 可调向旋转外螺纹插座
90° Adjustable rotating external thread sockets

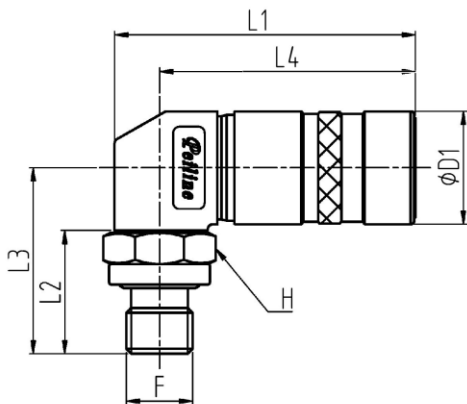

型号 Mould	尺寸 Dimensions(mm)							零件号 Part-number
	F	ΦD1	L1	L2	L3	L4	H	
CBI06	G1/4	22	56.5	24	35.5	48	19	CBI06 N00512808


连接橡胶软管插座
Connect rubber hose sockets

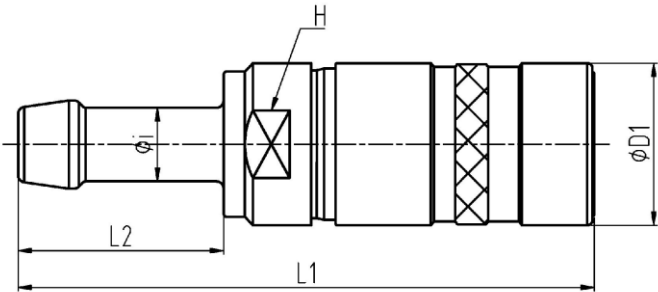

CBI

型号 Mould	尺寸 Dimensions(mm)					零件号 Part-number
	软管内径Φ (mm)	ΦD1	L1	L2	H	
CBI06	8	22	73.5	23	20	CBI06.1808/IA
	10	22	78.5	28	20	CBI06.1810/IA


连接自锁型软管插座
Connect self-locking hose sockets

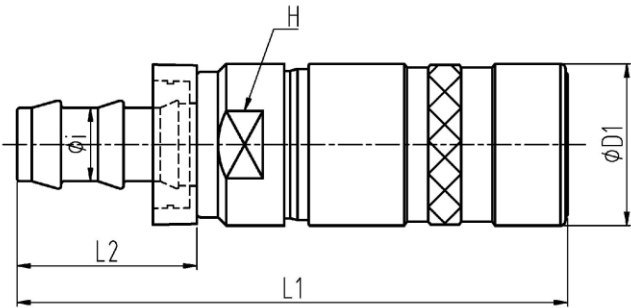

型号 Mould	尺寸 Dimensions(mm)					零件号 Part-number
	软管内径Φ (mm)	ΦD1	L1	L2	H	
CBI06	3/8"	22	74.5	23.5	20	CBI06.1810/IA/CN
CBI09	1/2"	30.5	115	28	22	CBI09.1813/IA/CN


90°连接自锁型软管插座
90°Connect self-locking hose sockets

CBI

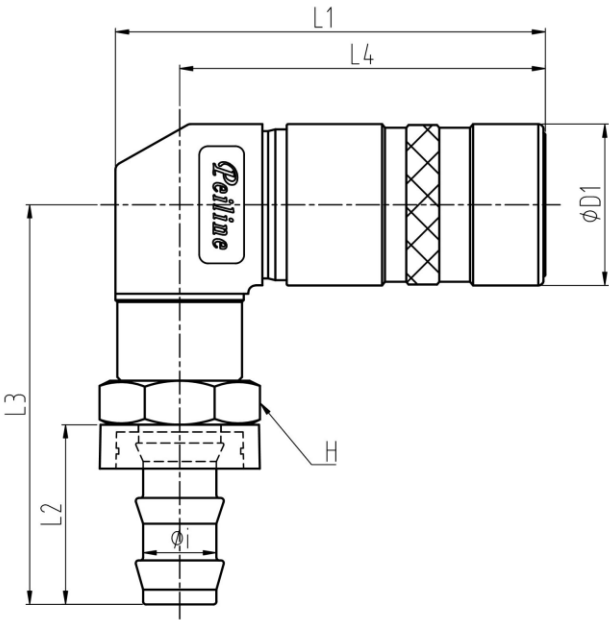

型号 Mould	尺寸 Dimensions(mm)							零件号 Part-number
	软管内径φ (mm)	ØD1	L1	L2	L3	L4	H	
CBI06	3/8"	22	56.5	23.5	56	48	19	CBI06.1810/IA/CN/RE
CBI09	1/2"	30.5	97	28	45	88	21	CBI09.1813/IA/CN/RE

内螺纹插头 Inner thread plugs

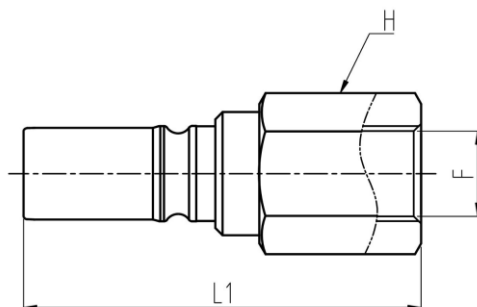

CBI

型号 Mould	尺寸 Dimensions(mm)			零件号 Part-number
	F	L1	H	
CBI03	G1/8	22	20	CBI03.7100/IA
	NPT1/8	22	21	CBI03.7200/IA
CBI06	G1/4	22	20	CBI06.7101/IA
	G3/8	22	21	CBI06.7102/IA
CBI09	G3/8	30.5	24	CBI09.7102/IA
CBI12	G1/2	30.5	24	CBI12.7103/IA
	NPT1/2	30.5	24	CBI12.7203/IA
CBI16	G3/4	53	36	CBI16.7104/IA
	NPT3/4	53	36	CBI16.7204/IA
CBI25	G1	53	36	CBI25.7105/IA
	G1 1/4	53	36	CBI25.7106/IA
	NPT1 1/4	66.5	55	CBI25.7206/IA
CBI03	G1/8	22	20	CBI03.7100/IA/BF
	NPT1/8	22	21	CBI03.7200/IA/BF
CBI06	G1/4	22	20	CBI06.7101/IA/BF
	G3/8	22	21	CBI06.7102/IA/BF
CBI09	G3/8	30.5	24	CBI09.7102/IA/BF
CBI12	G1/2	30.5	24	CBI12.7103/IA/BF
	NPT1/2	30.5	24	CBI12.7203/IA/BF
CBI16	G3/4	53	36	CBI16.7104/IA/BF
	NPT3/4	53	36	CBI16.7204/IA/BF


注：/BF 代表全不锈钢

Note: /BF stands for all stainless steel

英制外柱螺纹，带60°锥角密封插头

British standard outer string thread with 60° cone-angle sealing plugs

CBI

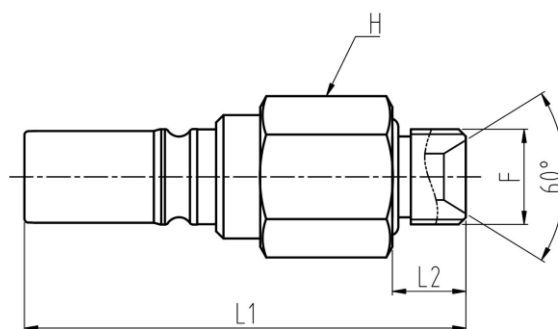

型号 Mould	尺寸 Dimensions(mm)				零件号 Part-number
	F	L1	L2	H	
CBI03	G1/8	39.5	8	13	CBI03.7150/IA
CBI06	G1/4	54	10	17	CBI06.7151/IA
	G3/8	53.5	11	21	CBI06.7152/IA
CBI09	G3/8	67	11	23	CBI09.7152/IA
CBI12	G1/2	85	14	30	CBI12.7153/IA
CBI16	G3/4	100.5	15	38	CBI16.7154/IA
CBI25	G1 1/4	101	21	55	CBI25.7156/IA
CBI03	G1/8	39.5	8	13	CBI03.7150/IA/BF
CBI06	G1/4	54	10	17	CBI06.7151/IA/BF
	G3/8	53.5	11	21	CBI06.7152/IA/BF
CBI09	G3/8	67	11	23	CBI09.7152/IA/BF
CBI12	G1/2	85	14	30	CBI12.7153/IA/BF
CBI16	G3/4	100.5	15	38	CBI16.7154/IA/BF

注：/BF 代表全不锈钢


Note: /BF stands for all stainless steel

加长式插头

英制外柱螺纹，带60°锥角密封插头

Extended plugs

British standard outer string thread with 60° cone-angle sealing plugs

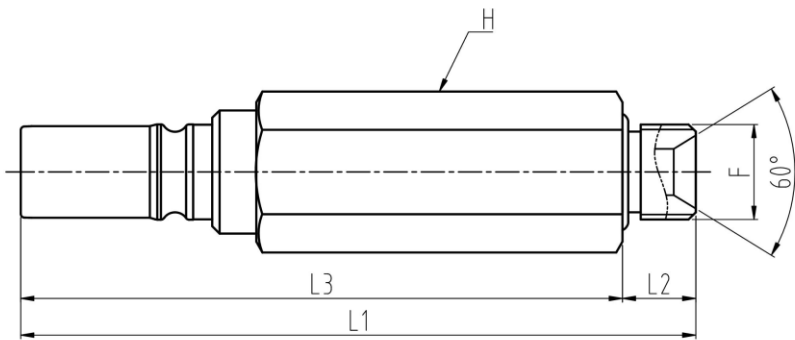


型号 Mould	尺寸 Dimensions(mm)					零件号 Part-number
	F	L1	L2	L3	H	
CBI06	G1/4	74	10	64	17	CBI06.7151/IA/64
	G1/4	92	10	84	17	CBI06.7151/IA/80
	G1/4	122	10	112	21	CBI06.7151/IA/110

英制外柱螺纹插头

British standard outer cone outer thread plugs

CBI

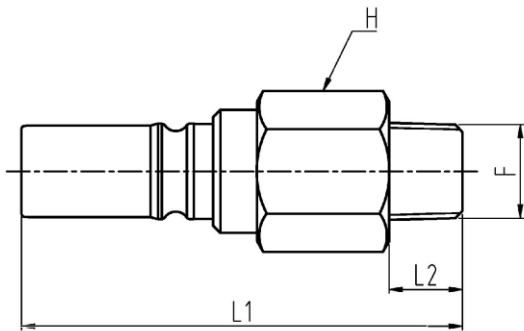


型号 Mould	尺寸 Dimensions(mm)				零件号 Part-number
	F	L1	L2	H	
CBI06	NPT1/4	53.5	11	17	CBI06.7251/IA
	NPT3/8	53	11	19	CBI06.7252/IA
	R1/4	53.5	11	17	CBI06.7161/IA
CBI09	NPT3/8	69	11	23	CBI09.7252/IA
	R3/8	67	11	23	CBI09.7162/IA
CBI12	R1/2	89	15	30	CBI12.7163/IA
CBI25	NPT1 1/4	98.5	22.5	55	CBI25.7256/IA
CBI12	R1/2	85	14	30	CBI12.7163/IA/BF

注：/BF 代表全不锈钢

Note: /BF stands for all stainless steel

90° 可调向旋转外螺纹插头

90° Adjustable rotating external thread plugs

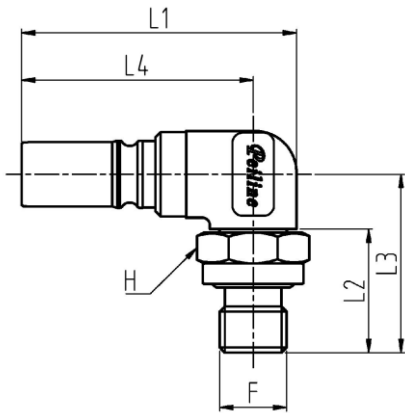

型号 Mould	尺寸 Dimensions(mm)							零件号 Part-number
	F	ΦD1	L1	L2	L3	L4	H	
CBI06	G1/4	22	56.5	24	36	48	19	CBI06 N00260306

Peiline®



- 1、产品最终尺寸和外观以实样为准。
Final dimension and apperance subject to actual product.
- 2、任何产品技术与工艺上的改进不能及时通知到你，敬请谅解。
We appreciate your understanding to us in case of some technology and product process improvements not inform you in time.

浙江樂樂智能流体科技有限公司

ZHEJIANG SHENSHEN INTELLINGEN TFLUID TECHNOLOGY CO.,LTD

诸暨爱克圣兰模具有限公司

ZHUJI EXCELLENT MOULD CO.,LTD

地址：浙江省诸暨市兴农路9号友地智能视觉产业园28幢A座

Add: Building A, No.28, UD Intelligent Vision Industrial Park.

No.9. Xinong Road.Zhuji City. Zhejiang. China

Tel: 0575-87958839

Fax: 0575-87958837

Mail: hzpeilin@126.com

hzaksl@126.com

Web: www.peiline.com