

Peiline®



粵粵智能流体科技

ShenShen Intelligent Fluid Technology

标准式样 GPL
standard style



GPL25 33 插座与插头/Sockets and plugs



应用领域/Application area

作为大型流体管道的理想选择，GPL 接头为连接高流速通路提供了紧凑而经济的解决方案。
符合人体工程学设计的自动锁定引脚，GPL 也非常耐用，长期使用的可靠性有保证的。
Automatic locking pins design by following Ergonomic concept, GPL guranante it's long-term reliability by extreme durable product.

坚固的连接插头/Tightly fastened connection plug

插头的主要部分采用高强度不锈钢制作，以确保以固定位置安装或装在软管上的工作部分耐碰撞。
The main part of the plug is made of high - strength stainless steel to ensure thatthe working part, whether installed in a fixed position or attached to a hose, isresistant to impacts.

自动锁紧/Auto - lock

只需将插头推入插座就自动锁紧:三根大直径不锈钢插针确保锁紧可靠。
另外，此锁紧系统还可以避免锁紧插针的脏污。
Simply push the plug into the socket, and it will lock automatically.
Three large -diameter stainless - steel pins ensure reliable locking.
In addition, this locking system can also prevent the locking pins from gettingdirty.

技术特点/technical charactetistics


型号/Model	GPL25	GPL33
通径/Bore diameter	25	33
最高工作压力 Max. working pressure (bar)	10	10

工作温度/Working temperatures

密封圈材质 Seal ring material	氟素橡胶 FKM Fluorocarbon	四丙氟橡胶 AFLAS Tetra-fluoro rubber	三元乙丙橡胶EPDM Ethylene-Propylene	全氟橡胶FFKM High fluorine rubber
使用温度 Service temperature	-20℃到+100℃	-20℃到+200℃	-20℃到+150℃	-20℃到+300℃

GPL


内螺纹的插座
Socket outlet with internal thread

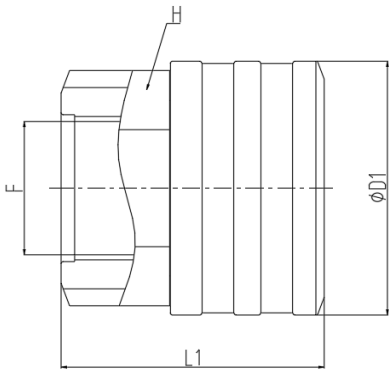

型号 Mould	尺寸 Dimensions(mm)				零件号 Part-number
	F	ΦD	L	H	
GPL25	G1	58	58	46	GPL25.1105
GPL33	G1 1/4	65	62	54	GPL33.1106
	G1 1/2	65	62	54	GPL33.1107

GPL

内螺纹的插头
Female thread plugs

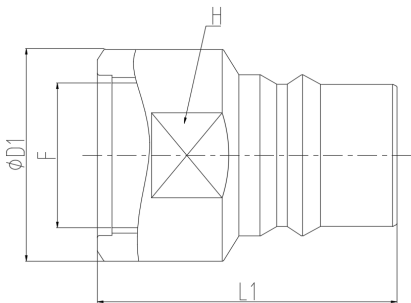

型号 Mould	尺寸 Dimensions(mm)				零件号 Part-number
	F	ΦD	L	H	
GPL25	G1	44.5	61	两面41	GPL25.6105
GPL33	G1 1/4	59	66	两面50	GPL33.6106
	G1 1/2	59	66	两面55	GPL33.6107

Peiline®



- 1、产品最终尺寸和外观以实样为准。
Final dimension and apperance subject to actual product.
- 2、任何产品技术与工艺上的改进不能及时通知到你，敬请谅解。
We appreciate your understanding to us in case of some technology and product process improvements not inform you in time.

浙江樂樂智能流体科技有限公司

ZHEJIANG SHENSHEN INTELLINGEN TFLUID TECHNOLOGY CO.,LTD

诸暨爱克圣兰模具有限公司

ZHUJI EXCELLENT MOULD CO.,LTD

地址：浙江省诸暨市兴农路9号友地智能视觉产业园28幢A座

Add: Building A, No.28, UD Intelligent Vision Industrial Park.

No.9. Xinong Road.Zhuji City. Zhejiang. China

Tel: 0575-87958839

Fax: 0575-87958837

Mail: hzpeilin@126.com

hzaksl@126.com

Web: www.peiline.com