

Peiline®



燊燊智能流体科技
ShenShen Intelligent Fluid Technology

标准式样 MPX
standard style



MPX06 10 12 16 19 25

插座与插头/Sockets and plugs



MPX

应用	Application
用于中压液压回路。 液压回路的快速连接，并能满足如下要求： -能防止回路和工作环境受到污染 -高性能要求 -安全要求 用于工业液压应用：设备连接，注塑机，抽芯回路等。	Used for medium pressure hydraulic loop.The rapid connection of hydraulic circuits and can meet the following requirements: -to prevent pollution of the circuit and working environment -High Performance Requirements -Security requirements. For industrial hydraulic applications: equipment connection, injection molding machine, pumping core loop, etc.


为中压液压服务	For medium pressure hydraulic service
1、自动连接 2、平头防污染技术 3、防意外断开安全功能 4、最佳流量 5、耐高温，与液压流体兼容性好 6、符合各种液压应用标准	1, Automatic connection 2, Flat head anti-pollution technology 3, Prevent accidental disconnection safety function 4, The best flow 5, High temperature resistance, good compatibility with hydraulic fluids 6, Meet various hydraulic application standards

技术特点/Technical characteristics

型号/Model		MPX06	MPX10	MPX12	MPX16	MPX19	MPX25
通径/Bore diameter		6	10	12	16	19	25
最高工作压力/Max. working pressure(bar)		315	250	250	250	250	200
最高工作温度 Max. working temperatures(°C)	-氟碳橡胶密封圈/FKM	-10到+180	-10到+180	-10到+180	-10到+180	-10到+180	-10到+180
	-丁腈橡胶密封圈/NBR	-15到+100	-15到+100	-15到+100	-15到+100	-	-

快速接头插座

Quick connector socket

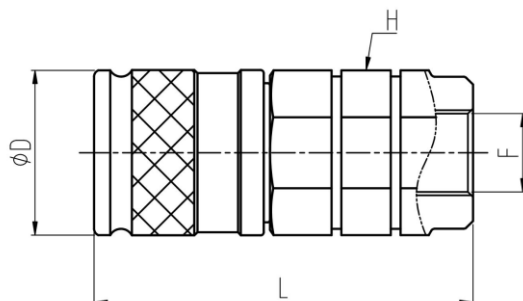


MPX

型号 Mould	尺寸 Dimensions(mm)				零件号 Part-number
	F	ΦD	L	H	
MPX06	G1/4	28	59	22	MPX06.1101/JV
	NPT1/4				MPX06.1201/JV
	UN9/16-18				MPX06.1314/JV
MPX10	G3/8	32	73.5	30	MPX10.1102/JV
	NPT3/8				MPX10.1202/JV
	G1/2				MPX10.1103/JV
	NPT1/2				MPX10.1203/JV
	UN9/16-18				MPX10.1314/JV
	UN3/4-16				MPX10.1319/JV
MPX12	G1/2	38	81	36	MPX12.1103/JV
	NPT1/2				MPX12.1203/JV
	G3/4				MPX12.1104/JV
	NPT3/4				MPX12.1204/JV
	UN3/4-16				MPX12.1319/JV
	UNF1 1/16-12				MPX12.1327/JV
MPX16	G3/4	42	84	36	MPX16.1104/JV
	NPT3/4				MPX16.1204/JV
	UNF1 1/16-12				MPX16.1327/JV
MPX19	G1	48	94.5	41	MPX19.1105/JV
	NPT1				MPX19.1205/JV
	UNF1 5/16-12				MPX19.1333/JV
MPX25	G1 1/4	55	109.5	55	MPX25.1106/JV
	NPT1 1/4				MPX25.1206/JV
	UNF1 5/8-12				MPX25.1341/JV

快速接头插头

Quick connector plugs

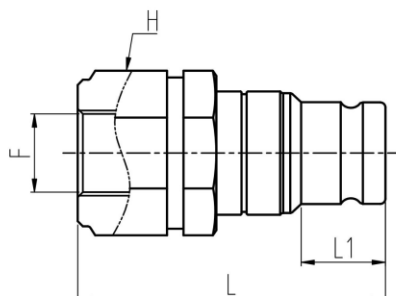

MPX

型号 Mould	尺寸 Dimensions(mm)				零件号 Part-number
	F	L	L1	H	
MPX06	G1/4	52	11	22	MPX06.7101/JV
	NPT1/4				MPX06.7201/JV
	UN9/16-18				MPX06.7314/JV
MPX10	G3/8	60	16	30	MPX10.7102/JV
	NPT3/8				MPX10.7202/JV
	G1/2				MPX10.7103/JV
	NPT1/2				MPX10.7203/JV
	UN9/16-18				MPX10.7314/JV
	UN3/4-16				MPX10.7319/JV
MPX12	G1/2	74	17.5	36	MPX12.7103/JV
	NPT1/2				MPX12.7203/JV
	G3/4				MPX12.7104/JV
	NPT3/4				MPX12.7204/JV
	UN3/4-16				MPX12.7319/JV
	UNF1 1/16-12				MPX12.7327/JV
MPX16	G3/4	74	17.5	36	MPX16.7104/JV
	NPT3/4				MPX16.7204/JV
	UNF1 1/16-12				MPX16.7327/JV
MPX19	G1	86	22.5	41	MPX19.7105/JV
	NPT1				MPX19.7205/JV
	UNF1 5/16-12				MPX19.7333/JV
MPX25	G1 1/4	92	23	55	MPX25.7106/JV
	NPT1 1/4				MPX25.7206/JV
	UNF1 5/8-12				MPX25.7341/JV

Peiline®



- 1、产品最终尺寸和外观以实样为准。
Final dimension and apperance subject to actual product.
- 2、任何产品技术与工艺上的改进不能及时通知到你，敬请谅解。
We appreciate your understanding to us in case of some technology and product process improvements not inform you in time.

浙江樂樂智能流体科技有限公司

ZHEJIANG SHENSHEN INTELLINGEN TFLUID TECHNOLOGY CO.,LTD

诸暨爱克圣兰模具有限公司

ZHUJI EXCELLENT MOULD CO.,LTD

地址：浙江省诸暨市兴农路9号友地智能视觉产业园28幢A座

Add: Building A, No.28, UD Intelligent Vision Industrial Park.

No.9. Xinong Road.Zhuji City. Zhejiang. China

Tel: 0575-87958839

Fax: 0575-87958837

Mail: hzpeilin@126.com

hzaksl@126.com

Web: www.peiline.com