


Peiline®



燊燊智能流体科技
ShenShen Intelligent Fluid Technology

组合板系列-SCI
Combination board series

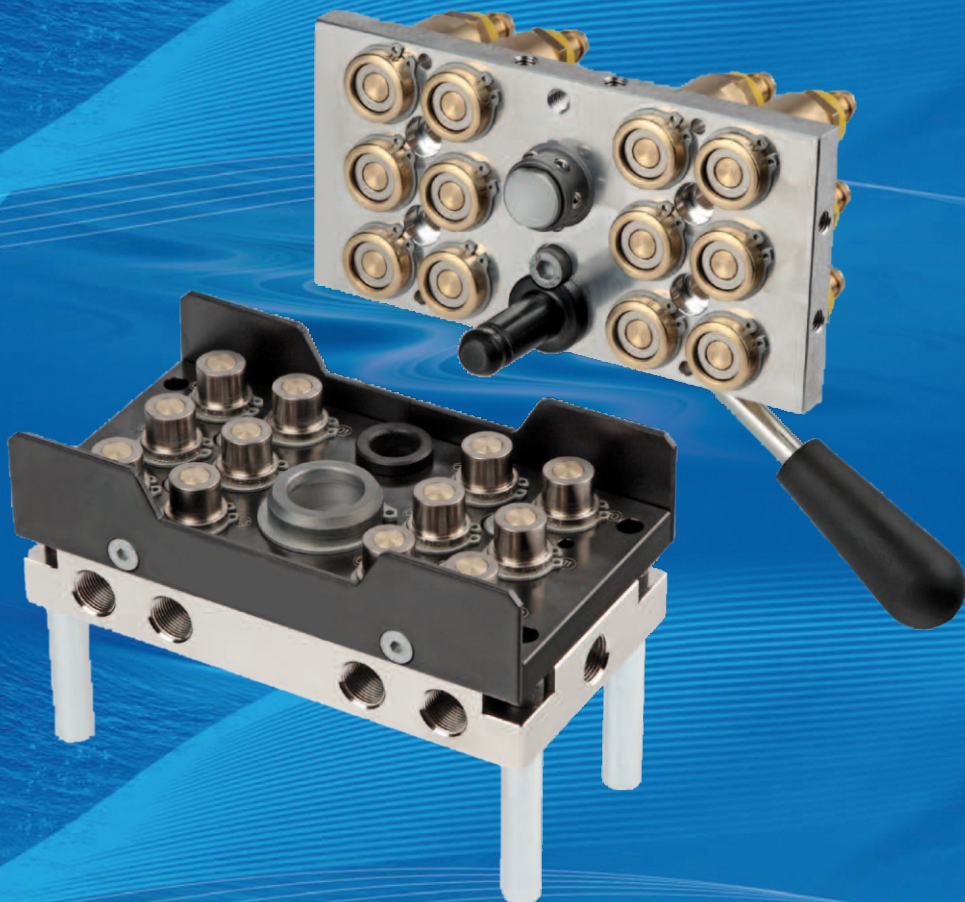

使用条件/Conditions of use

密封 Sealing	温度范围 Working temperatures	最大工作压力 Maximum working pressure
氟素橡胶 FKM	+15℃至+150℃	16bar
	+15℃至+200℃	10bar
三元乙丙 EPDM	-20℃至+150℃	16bar
丁腈 NBR	-15℃至+100℃	16bar

SCI209多接头组合板 (SCI209 Multi-joints) 6个接头 (3个回路) 组合板 6joints (3circuits)

设备侧

Press side


SCI209移动组合板

SCI209 multi-coupling plates on press side

装有6个SCI09单向阀插座(3个回路), 用于软管内径 $\phi 10$ mm或 $\phi 12$ mm

Fitted with 6 SCI09 shut-off sockets (3 circuits) for 10 mm or 12 mm inside ϕ hose connection

组合板
SCI

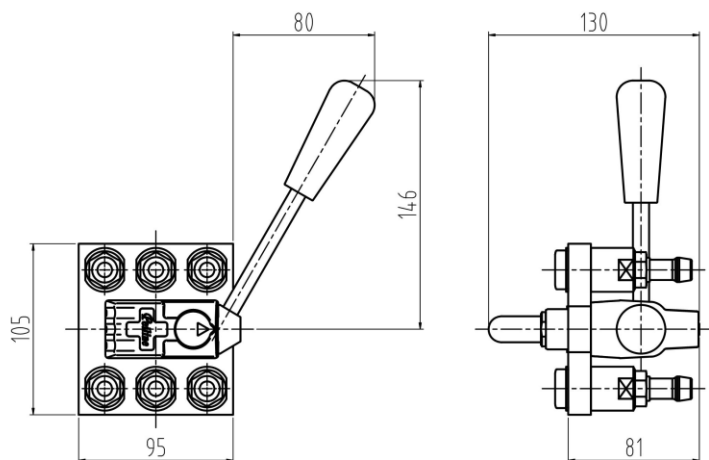

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.06	10mm内径软管插座	SCI209.06.1810/JV
	12mm内径软管插座	SCI209.06.1812/JV

配备6个SCI09单向阀插座(3个回路)

Fitted with 6 SCI09 shut-off sockets(3circuits)

对于peiline自锁聚氨酯软管，该软管的使用条件:

-最大工作压力=10 bar

-最高工作温度=90°C


For peiline self-lock polyurethane hose conditions of use with this hose:

-Max.working pressure=10 bar

-Max.working temperature=90°C

其他软管:请咨询我们

For other hose: consult us

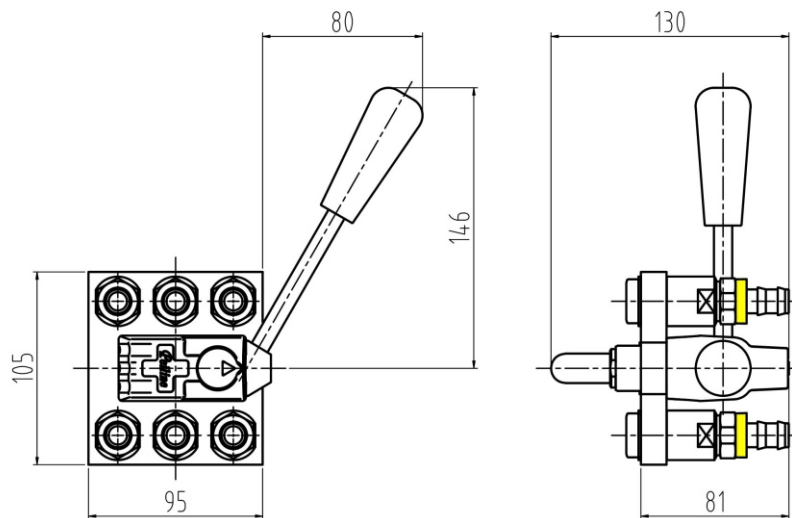


组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.06	配备6个SCI09 10mm内径软管插座	SCI209.06.1810/CN/JV
	配备6个SCI09 13mm内径软管插座	SCI209.06.1813/CN/JV

配备6个SCI09单向阀插座(3个回路), 带G3/8或NPT3/8内螺纹

Fitted with 6 SCI09 shut-off sockets(3 circuits) threaded G3/8" or NPT3/8" female

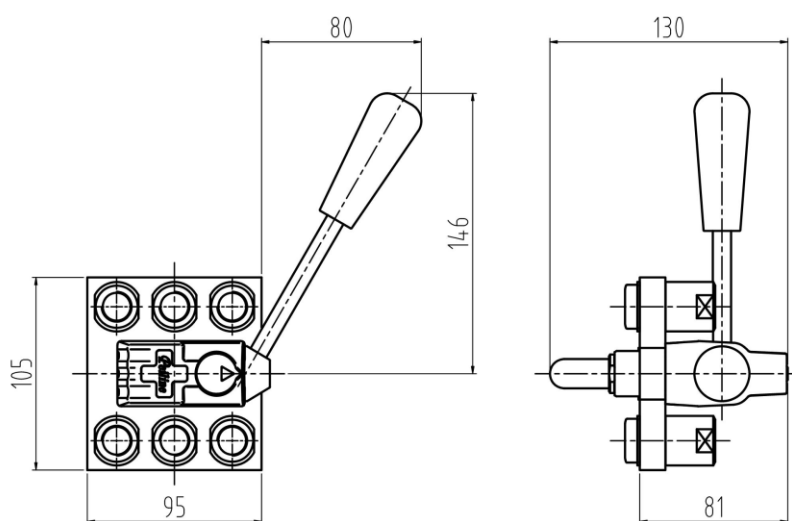

组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.06	G3/8内螺纹	SCI209.06.1102/JV
	NPT3/8内螺纹	SCI209.06.1202/JV

模具侧

Mould side

SCI209模具侧固定组合板

SCI209 fixed multi-coupling plates on mould side

最多可安装6个SCI09插头




Will receive upto 6 SCI09 plugs

不带插头的固定板

Fixed plates supplied without plugs

SCI09插头：参见157到159

SCI09 plugs: see § 157to159

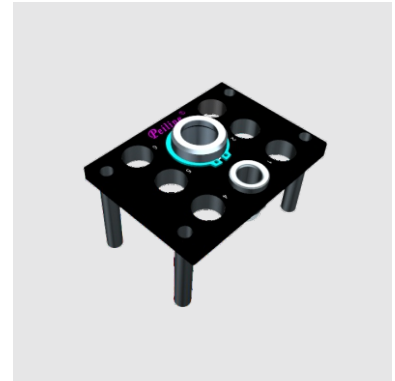

组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.06	不带插头组合板	SCI209.06.6000
	配备6个SCI09.5102/JV (G3/8内螺纹) 组合板	SCI209.06.7102/JV
	配备6个SCI09.5202/JV (NPT3/8内螺纹) 组合板	SCI209.06.7202/JV



10个接头(5个回路)组合板 10 joints (5 circuits)

SCI209移动组合板

SCI209 multi-coupling plates on press side

装有10个SCI09单向阀插座(5个回路)，用于软管内径 $\phi 10$ mm或 $\phi 12$ mm

Fitted with 10 SCI09 shut-off sockets (5 circuits) for 10 mm or 12 mm inside ϕ hose connection

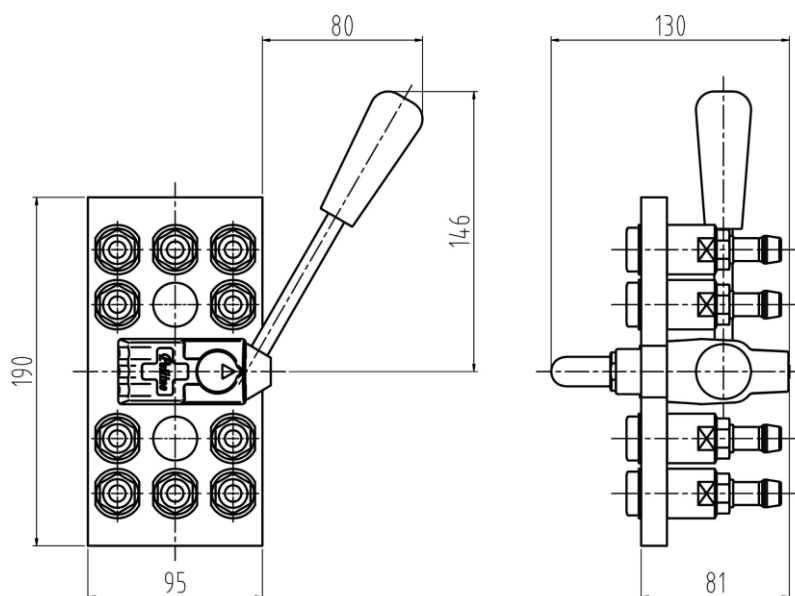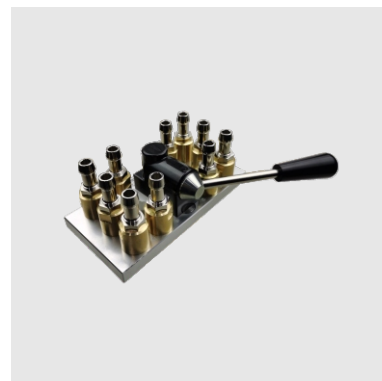

组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.10	10mm内径软管插座	SCI209.10.1810/JV
	12mm内径软管插座	SCI209.10.1812/JV

配备10个SCI09单向阀插座(5个回路)

Fitted with 10 SCI09 shut-off sockets(5circuits)

对于peiline自锁聚氨酯软管，该软管的使用条件:

-最大工作压力=10 bar

-最高工作温度=90°C


for peiline self-lock polyurethane hose conditions of use with this hose:

-Max.working presssure=10 bar

-Max.working temperature=90°C

其他软管:请咨询我们

for other hose: consult us

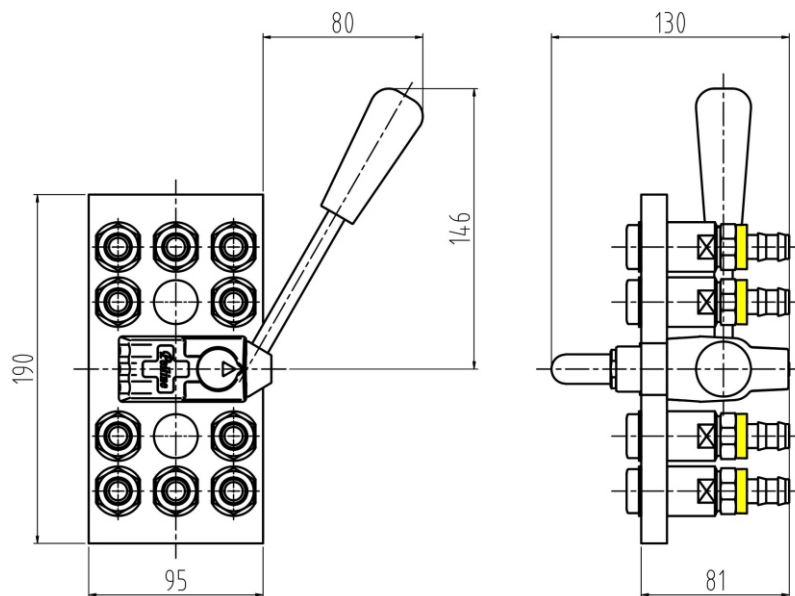


组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.10	配备10个SCI09 10mm内径软管插座	SCI209.10.1810/CN/JV
	配备10个SCI09 13mm内径软管插座	SCI209.10.1813/CN/JV

配备10个SCI09单向阀插座(5个回路), 带G3/8或NPT3/8内螺纹

Fitted with 10 SCI09 shut-off sockets(5 circuits) threaded G3/8" or NPT3/8" female

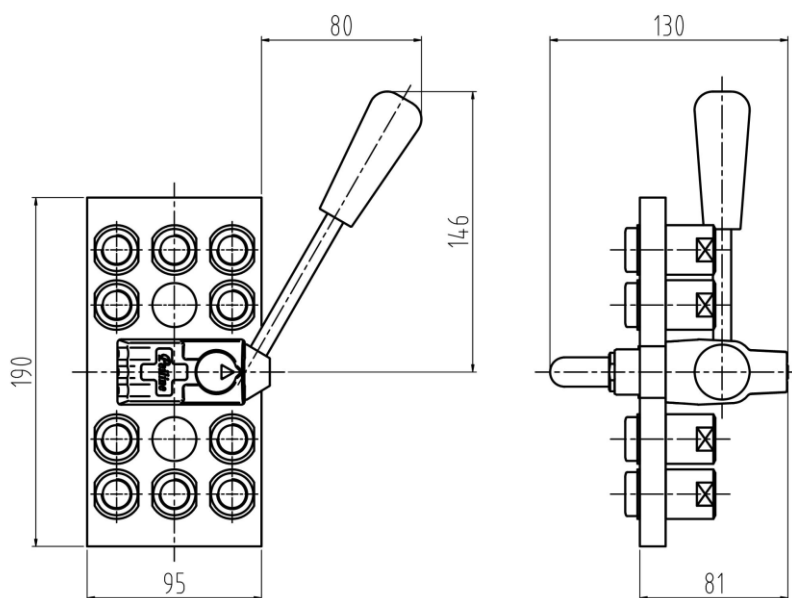

组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.10	G3/8内螺纹	SCI209.10.1102/JV
	NPT3/8内螺纹	SCI209.10.1202/JV

模具侧

Mould side

SCI209模具侧固定组合板



SCI209 fixed multi-coupling plates on mould side

配备10个SCI09全通插头(5个回路)

Fitted with 10 SCI09 full plugs(5circuits)

3/8" BSP 内螺纹侧连接

3/8" BSP female thread side connections

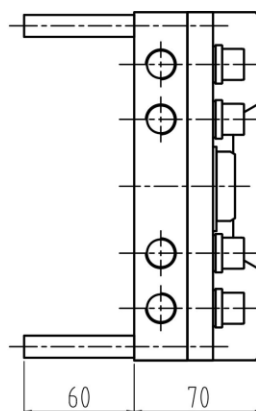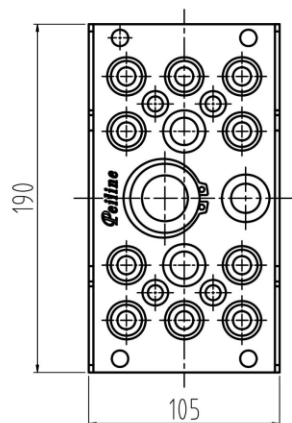

组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.10	可配10个G3/8内螺纹连接件 5进5出	SCI209.10.7102/JV/RE
	可配10个NPT3/8内螺纹连接件 5进5出	SCI209.10.7202/JV/RE

12个接头(6个回路)组合板 12 joints(6 circuits)

设备侧



Press side

SCI209移动组合板

SCI209 multi-coupling plates on press side

装有12个SCI09单向阀插座(6个回路), 用于软管内径 $\phi 10$ mm或 $\phi 12$ mm

Fitted with 12 SCI09 shut-off sockets (6 circuits) for $\phi 10$ mm or $\phi 12$ mm
Inside hose connection

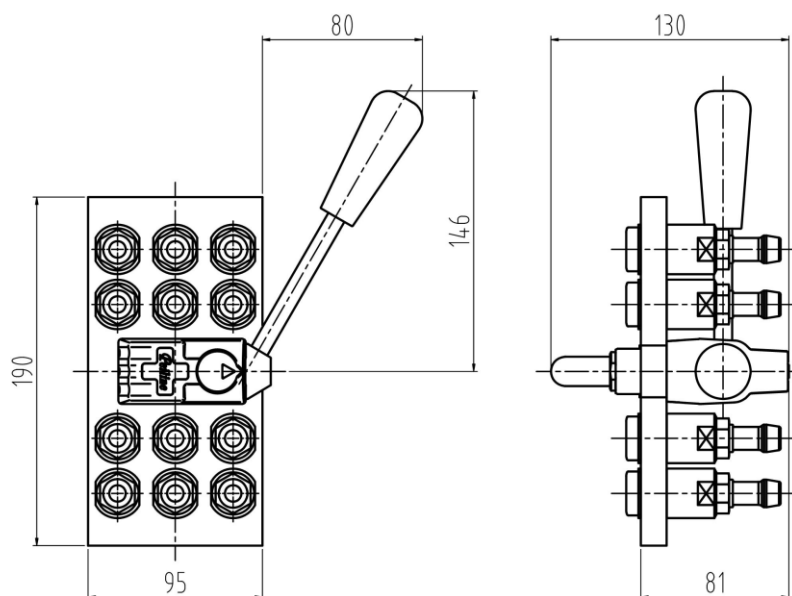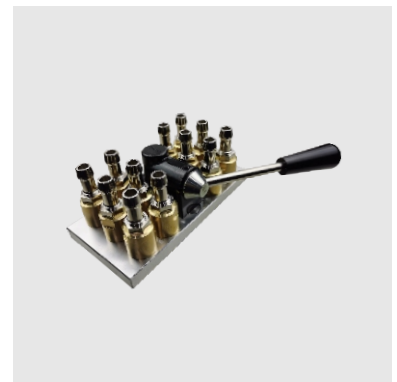

组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.12	配备12个SCI09 10mm内径软管插座	SCI209.12.1810/JV
	配备12个SCI09 12mm内径软管插座	SCI209.12.1812/JV

配备12个SCI09单向阀插座(6个回路)

Fitted with 12 SCI09 shut-off sockets(6circuits)

对于peiline自锁聚氨酯软管，该软管的使用条件:

-最大工作压力=10 bar

-最高工作温度=90°C


For peiline self-lock polyurethane hose conditions of use with this hose:

-Max.working presssure=10 bar

-Max.working temperature=90°C

其他软管:请咨询我们

For other hose: consult us


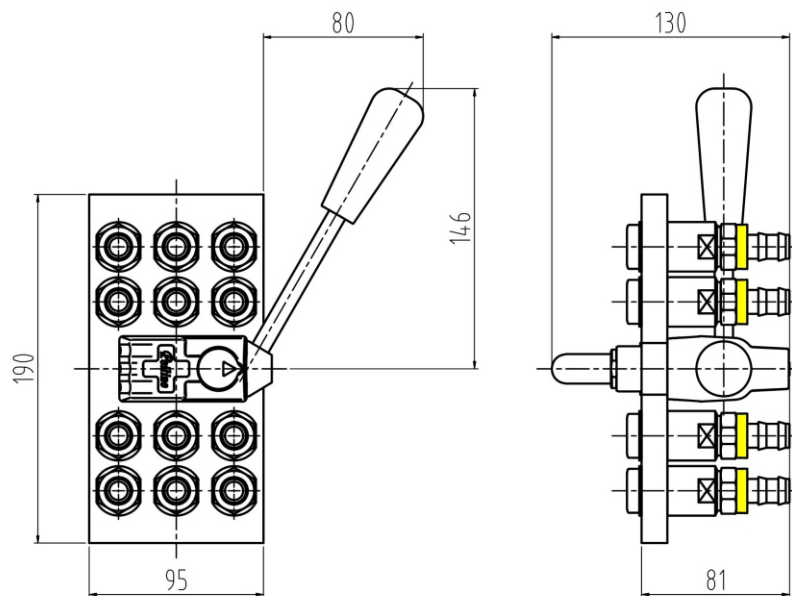


组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.12	配备12个SCI09 10mm内径软管插座	SCI209.12.1810/CN/JV
	配备12个SCI09 13mm内径软管插座	SCI209.12.1813/CN/JV

配备12个SCI09单向阀插座(6个回路), 带3/8" BSP或NPT内螺纹

Fitted with 12 SCI09 shut-off sockets (6 circuits) threaded 3/8" BSP or NPT female

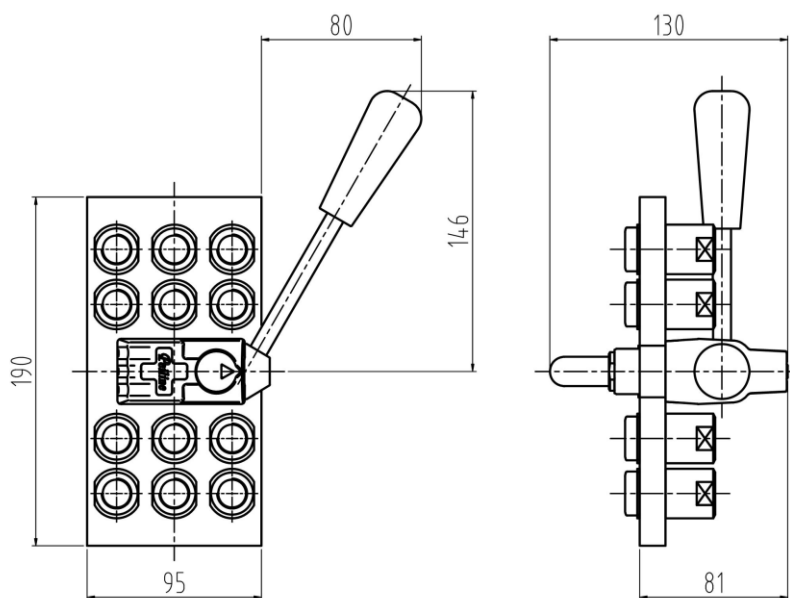
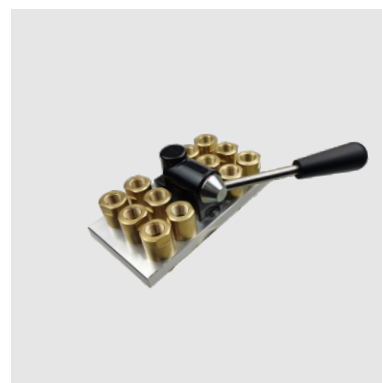


组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.12	G3/8内螺纹	SCI209.12.1102/JV
	NPT3/8内螺纹	SCI209.12.1202/JV

配备12个SCI09单向阀插座(6个回路), 带3/8"BSP

Fitted with 12 SCI09 shut-off sockets (6 circuits) threaded 3/8" BSP external threads

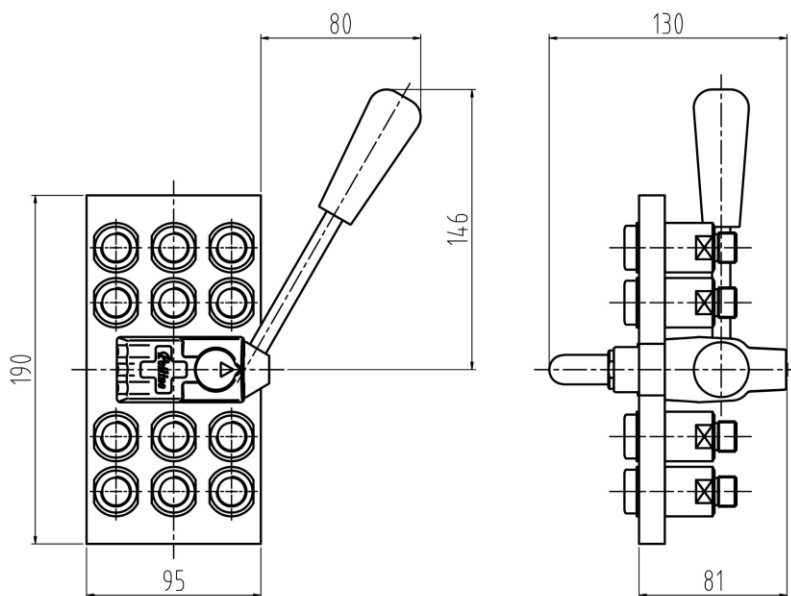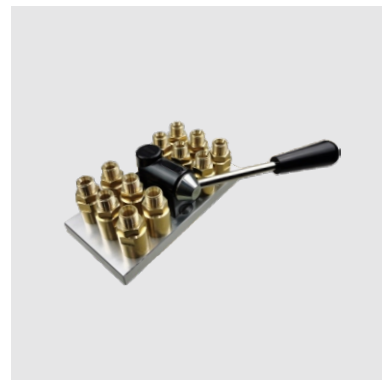


组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.12	G3/8内螺纹/60°锥管螺纹	SCI209.12.1152/JV

带中央进、出口回路-内螺纹G1"

With centralized inlet and outlet circuits-female G1"

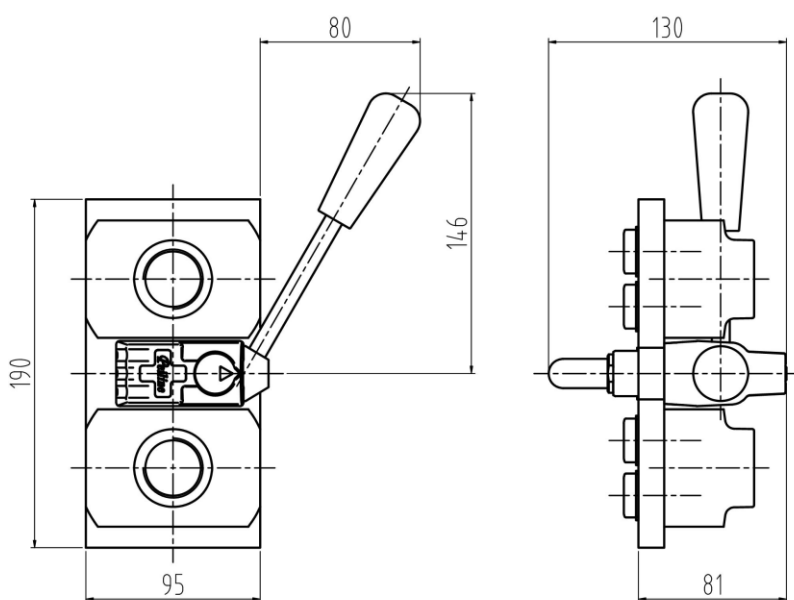

组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.12	带中央进、出口回路-G1内螺纹	SCI209.12.1105/JV

模具侧

Mould side

SCI209模具侧固定板

SCI209 fixed multi-coupling plates on mould side

不带插头的固定板



Fixed plates supplied without plugs

最多可接收12个SCI09插头

Will receive upto 12 SCI09 plugs

SCI09插头：参见157到159



SCI09 plugs: see § 157to159

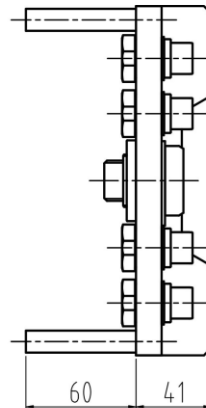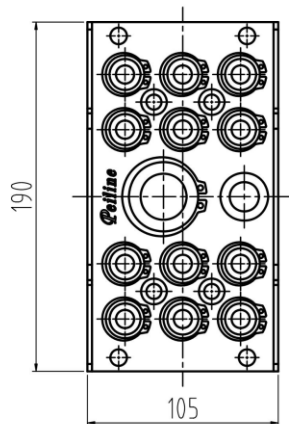

组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.12	可配12个插头 6进6出	SCI209.12.6000/L
	配备12个SCI09.5102/JV (G3/8内螺纹) 组合板	SCI209.12.7102/JV
	配备12个SCI09.5202/JV (NPT3/8内螺纹) 组合板	SCI209.12.7202/JV




最多可接收12个SCI09插头
Will receive upto 12 SCI09 plugs

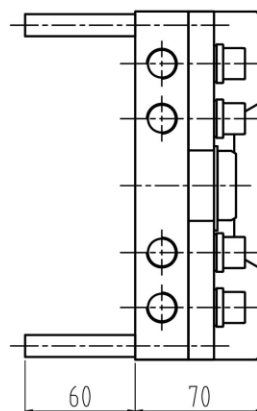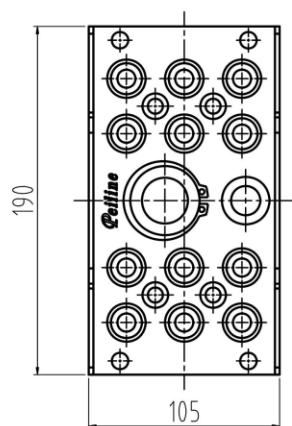

组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.12	配备12个SCI09.5000/JV (G3/8内螺纹) 组合板	SCI209.12.7102/JV/RE
	配备12个SCI09.5000/JV (NPT3/8内螺纹) 组合板	SCI209.12.7202/JV/RE

最多可接收12个SCI09插头
Will receive upto 12 SCI09 plugs

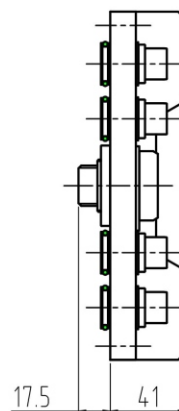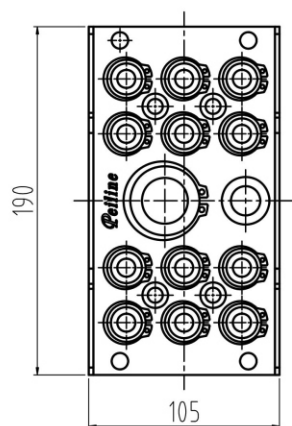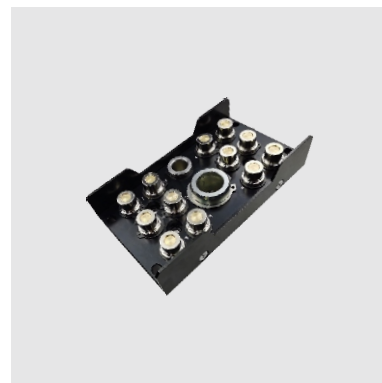

组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.12	配备12个SCI09.5000/JV 组合板	SCI209.12.7000/JV

20个接头(10个回路)组合板


20 joints (10 circuits)

设备侧

Press side

SCI209移动组合板


SCI209 multi-coupling plates on press side

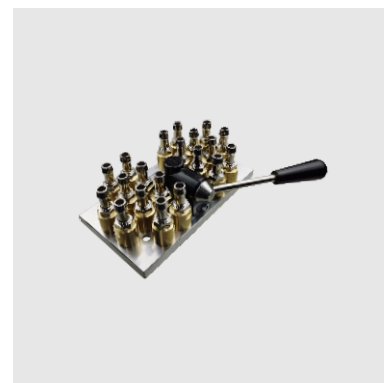

装有20个SCI09单向阀插座(10个回路), 用于软管内径 $\phi 10$ mm或 $\phi 12$ mm

Fitted with 20 SCI09 shut-off sockets (10 circuits) for $\phi 10$ mm or $\phi 12$ mm inside hose connection

组合板
SCI

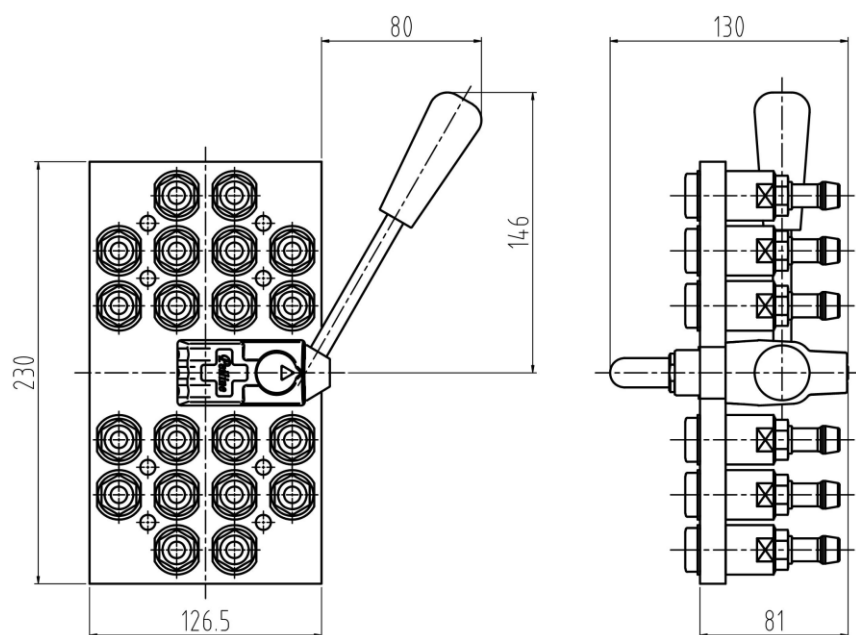

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.20	配备20个SCI09 10mm内径软管插座	SCI209.20.1810/JV
	配备20个SCI09 12mm内径软管插座	SCI209.20.1812/JV

配备20个SCI09单向阀插座(10个回路)

Fitted with 20 SCI09 shut-off sockets(10circuits)

对于peiline自锁聚氨酯软管，该软管的使用条件:

-最大工作压力=10 bar

-最高工作温度=90°C



For peiline self-lock polyurethane hose conditions of use with this hose:

-Max.working presssure=10 bar

-Max.working temperature=90°C

其他软管:请咨询我们

For other hose: consult us

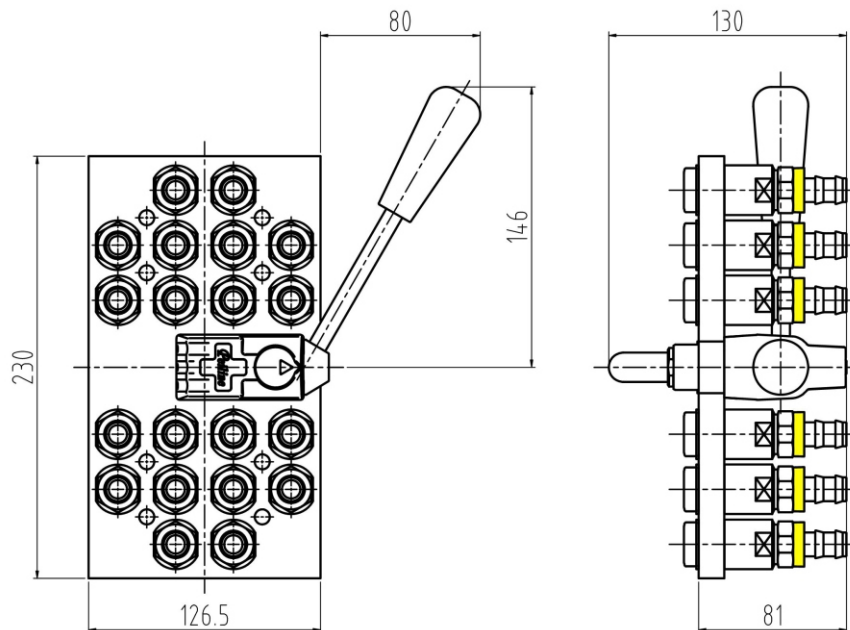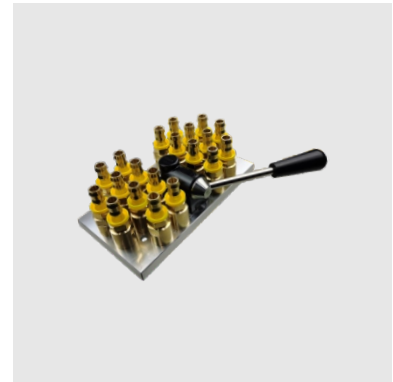


组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.20	配备20个SCI09 10mm内径软管插座	SCI209.20.1810/CN/JV
	配备20个SCI09 13mm内径软管插座	SCI209.20.1813/CN/JV

配备20个SCI09单向阀插座(10个回路), 带3/8" BSP或NPT内螺纹

Fitted with 20 SCI09 shut-off sockets (10 circuits) threaded 3/8" BSP or NPT female


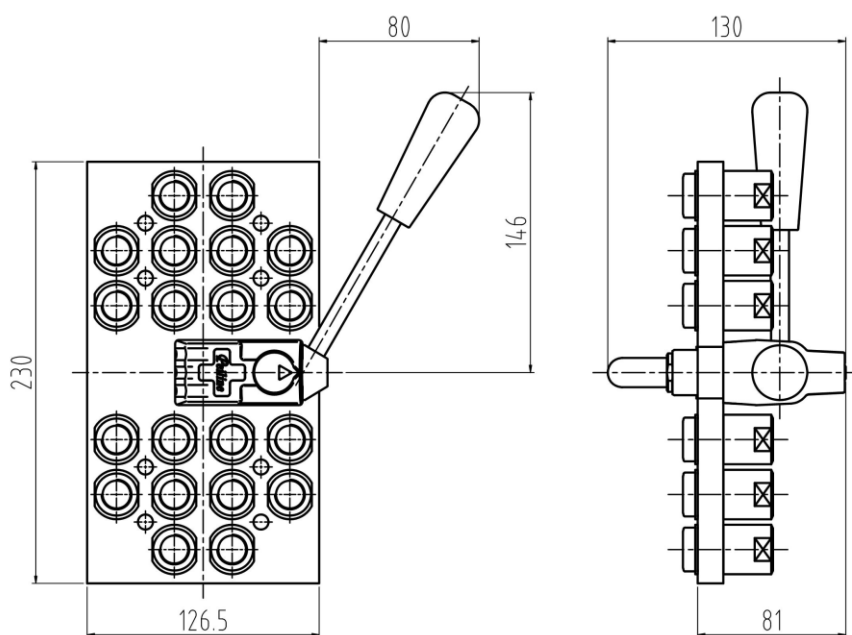


组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.20	G3/8内螺纹	SCI209.20.1102/JV
	NPT3/8内螺纹	SCI209.20.1202/JV

配备20个SCI09单向阀插座(10个回路), 带3/8"BSP

Fitted with 20 SCI09 shut-off sockets (10 circuits) threaded 3/8" BSP external threads

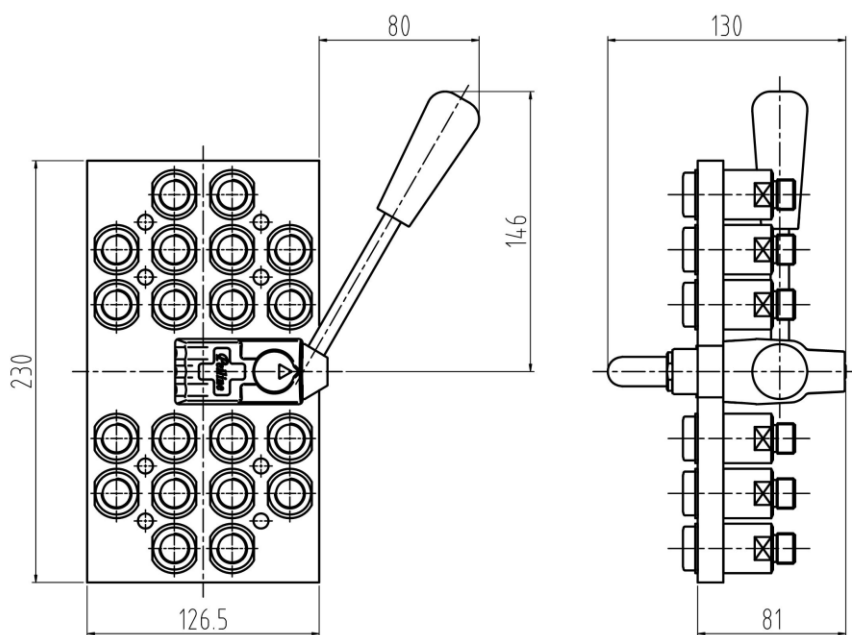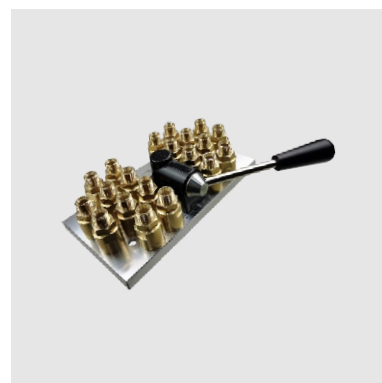

组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.20	G3/8内螺纹/60°锥管螺纹	SCI209.20.1152/JV

模具侧

Mould side

SCI209模具侧固定组合板

SCI209 fixed multi-coupling plates on mould side

不带插头的固定板




Fixed plates supplied without plugs

最多可接收20个SCI09插头

Will receive upto 20 SCI09 plugs

SCI09插头：参见157到159




SCI09 plugs: see § 157to159

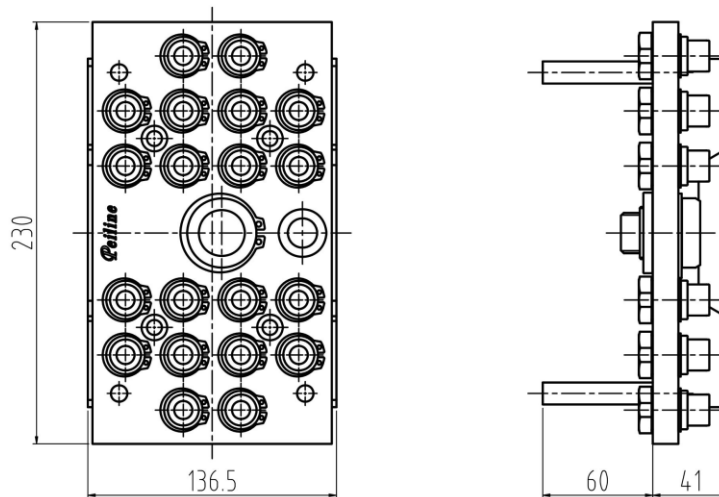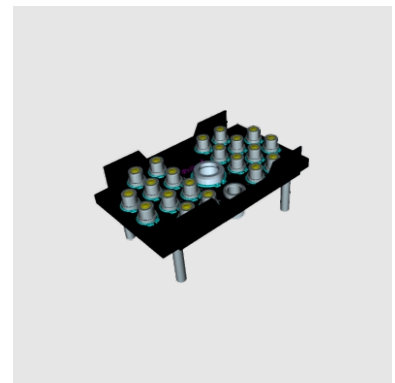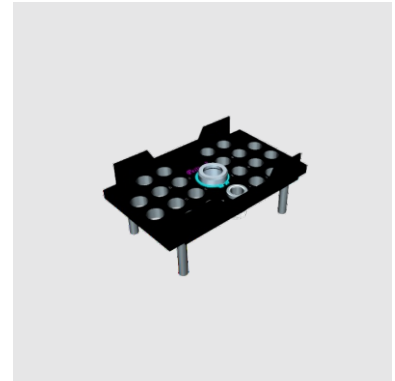

组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.20	可配20个插头 10进10出	SCI209.20.6000/L
	配备20个SCI09.5102/JV (G3/8内螺纹) 组合板	SCI209.20.7102/JV
	配备20个SCI09.5202/JV (NPT3/8内螺纹) 组合板	SCI209.20.7202/JV

最多可接收20个SCI09插头
Will receive upto 20 SCI09 plugs

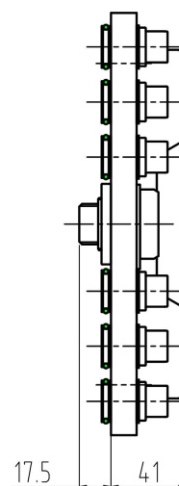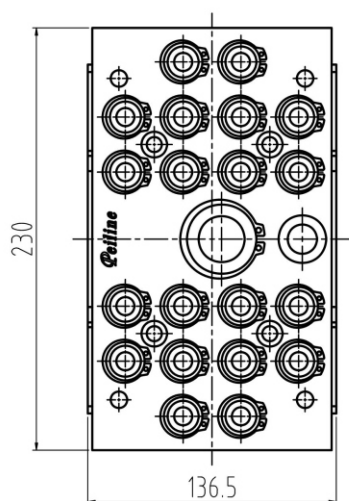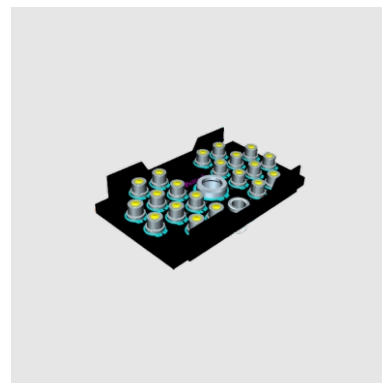

组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI209.20	配备20个SCI09.5000/JV 组合板	SCI209.20.7000/JV

SCI09 用于SCI209组合板的接头 SCI09 Joints for SCI209*

组合板配件


Multi-couplings fittings

SCI09带3/8"BSP或NPT内螺纹的直通插头

SCI09 multi-coupling plates on press side

用于模具侧的SCI209固定组合板(参见138、148和155)

For SCI209 fixed multi-coupling plates on mould base (see § 148 and 155)

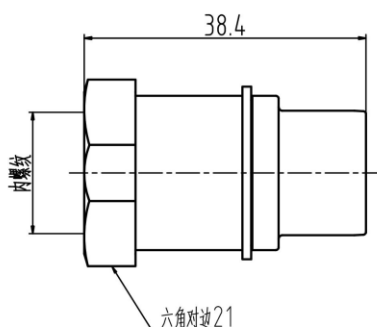

组合板
SCI


型号 Mould	规格描述 Specification description	零件号 Part-number
SCI09	G3/8内螺纹	SCI09.4102
	NPT3/8内螺纹	SCI09.4202

SCI09带3/8" BSP或NPT内螺纹的单向阀

SCI09 shut-off valve plugs with 3/8" BSP or NPT female thread

用于模具侧的SCI209固定组合板(参见138、148和155)

For SCI209 fixed multi-coupling plates on mould base (see § 148 and 155)

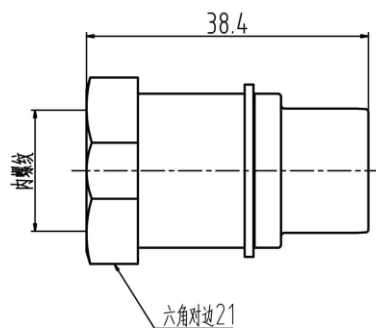


组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI09	G3/8内螺纹	SCI09.5102/JV
	NPT3/8内螺纹	SCI09.5202/JV

90°弯头配内径10-12mm软管-外螺纹3/8"BSP

90°elbows for flexible hose with 10-12 mm inside ϕ -male 3/8"BSP

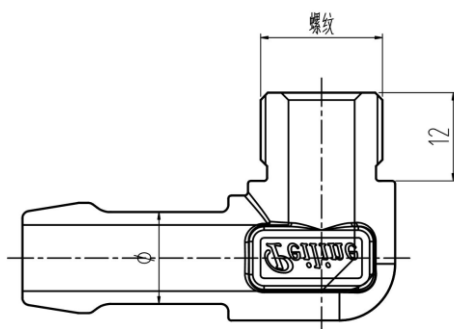


型号 Mould	规格描述 Specification description	零件号 Part-number
AF	G3/8外螺纹, $\phi=10\text{mm}$	AF152.10/RE
	G3/8外螺纹, $\phi=12\text{mm}$	AF152.12/RE

延长接头3/8"BSP-母3/8"BSP

Extenders male 3/8"BSP-female 3/8"BSP

组合板
SCI

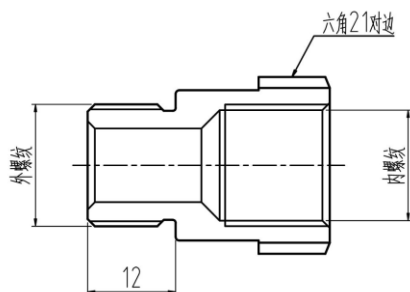


型号 Mould	规格描述 Specification description	零件号 Part-number
RMF	G3/8外螺纹-G3/8内螺纹	RMF152.102/LN

内置SCI09单向阀连接内径10-12mm的软管

Built-in SCI09 shut-off sockets for 10-12mm inside ϕ hose connection

用于SCI209移动组合板(参见135、139、143和151)

Fitting on SCI209 mobile multi-coupling plates for press side
(see § 135、139、143and151)

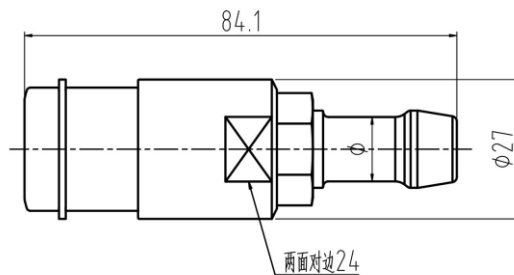


型号 Mould	规格描述 Specification description	零件号 Part-number
SCI09	连接10mm内径软管	SCI09.2810/JV
	连接12mm内径软管	SCI09.2812/JV

内置SCI09单向阀，带3/8"BSP或NPT内螺纹

Built-in SCI09 shut-off sockets with 3/8" BSP or NPT female thread

用于SCI209移动组合板(参见137、141、145和153)

Fitting on SCI209 mobile multi-coupling plates for press side
(see § 137、141、145and153)

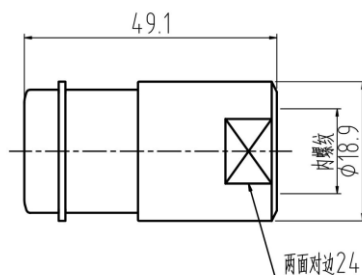

组合板
SCI

型号 Mould	规格描述 Specification description	零件号 Part-number
SCI09	G3/8内螺纹	SCI09.2102/JV
	NPT3/8内螺纹	SCI09.2202/JV

Peiline®



- 1、产品最终尺寸和外观以实样为准。
Final dimension and apperance subject to actual product.
- 2、任何产品技术与工艺上的改进不能及时通知到你，敬请谅解。
We appreciate your understanding to us in case of some technology and product process improvements not inform you in time.

浙江樂樂智能流体科技有限公司

ZHEJIANG SHENSHEN INTELLINGEN TFLUID TECHNOLOGY CO.,LTD

诸暨爱克圣兰模具有限公司

ZHUJI EXCELLENT MOULD CO.,LTD

地址：浙江省诸暨市兴农路9号友地智能视觉产业园28幢A座

Add: Building A, No.28, UD Intelligent Vision Industrial Park.

No.9. Xinong Road.Zhuji City. Zhejiang. China

Tel: 0575-87958839

Fax: 0575-87958837

Mail: hzpeilin@126.com

hzaksl@126.com

Web: www.peiline.com