


Peiline®



燚燚智能流体科技
ShenShen Intelligent Fluid Technology

组合板系列-SMI
Combination board series

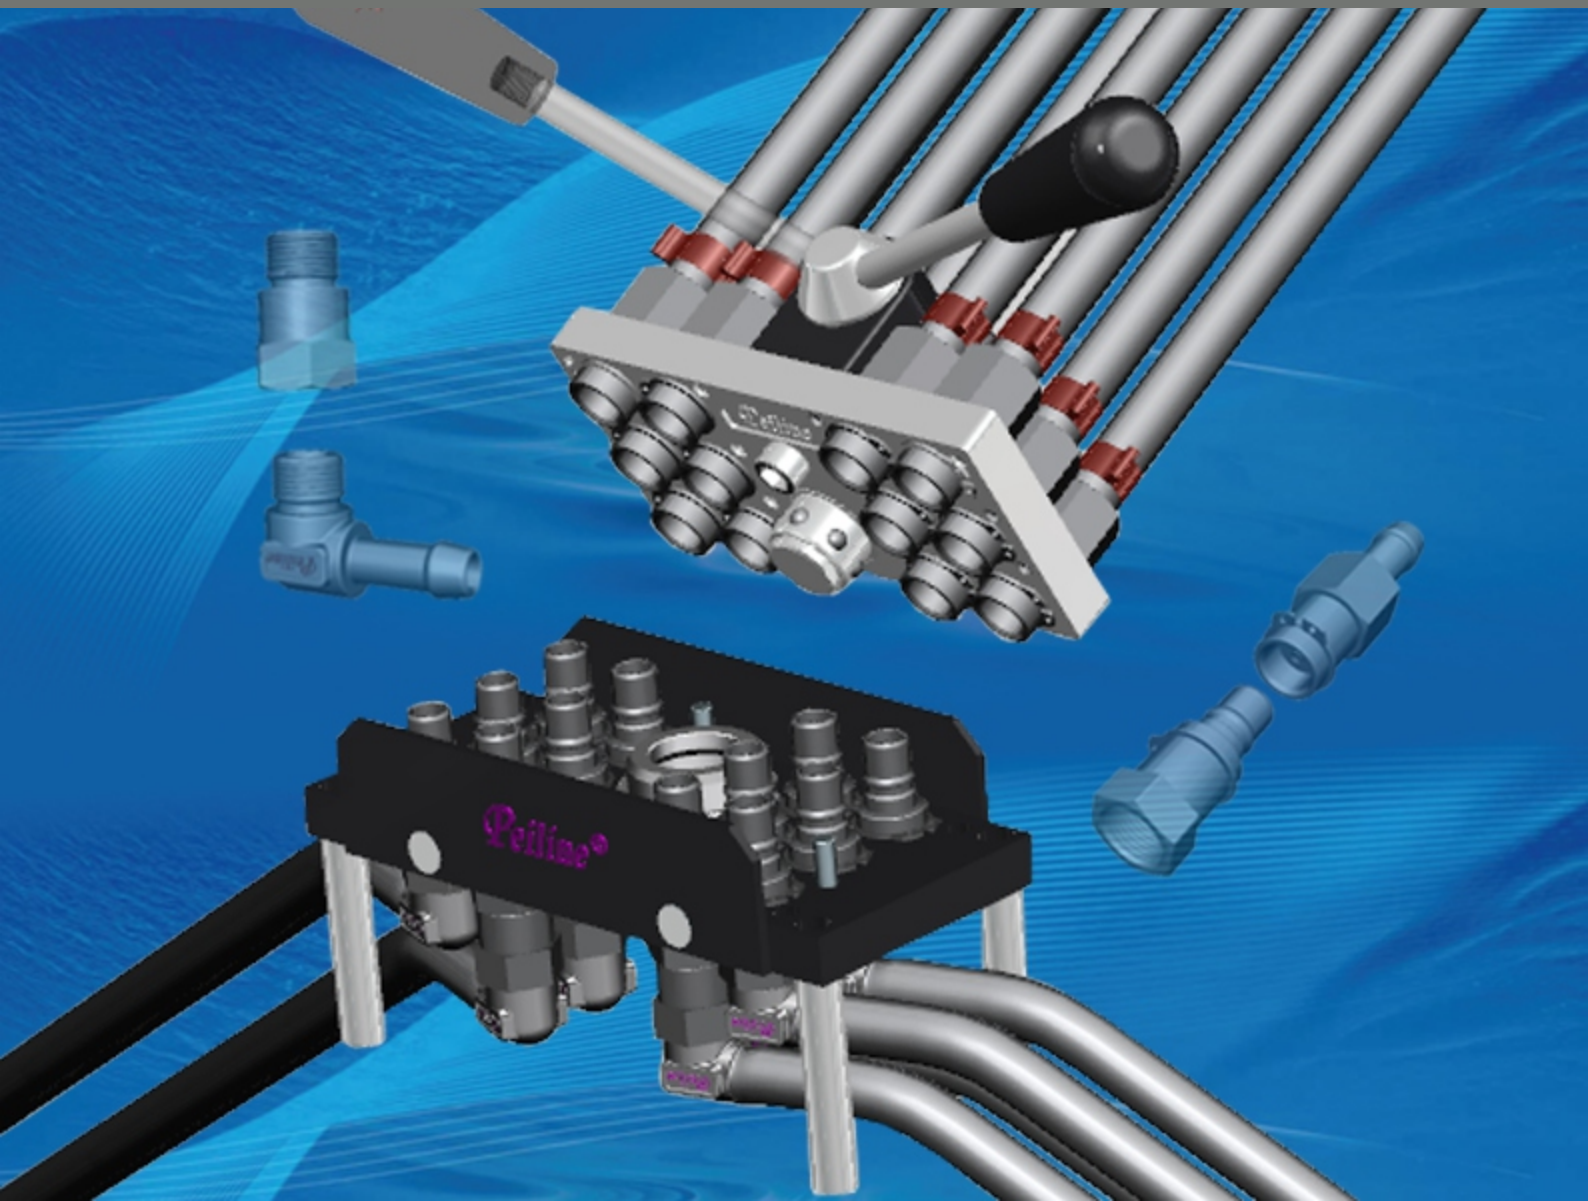

使用条件/Conditions of use

型号 Modle	密封 Sealing	氟素橡胶 FKM	三元乙丙 EPDM	丁腈 NBR
SMI206、SMI212和SMI216 (自锁软管的除外) SMI206、SMI212 and SMI216 (Except for self-locking hoses)		温度：+15℃至+200℃ PMS: 10bar	温度：-20℃至+150℃ PMS: 16bar	温度：-15℃至+100℃ PMS: 16bar
		温度：+15℃至+150℃ PMS: 16bar		
SMI209 (自锁软管的除外) SMI209		温度：+15℃至+130℃ PMS: 16bar	温度：-20℃至+130℃ PMS: 16bar	温度：-15℃至+100℃ PMS: 16bar
配置自锁软管接头的组合版 Combined version with self-locking hose fittings		温度：+15℃至+90℃ PMS: 10bar	温度：+3℃至+90℃ PMS: 10bar	温度：+3℃至+90℃ PMS: 10bar
PMS=最大工作压力/Maximum working pressure				

SMI206多接头组合板(SMI206 Multi-joints)

设备侧

Press side



SMI206移动组合板

SMI206 mobile multi-coupling plates on press side

装有6个6mm通径单向阀插座(3个回路)，用于软管内径8mm或10mm

Fitted with 6 shut-off sockets of 6 mm passage ϕ (3 circuits) for 8 mm or 10 mm inside ϕ hose connection

组合板
SMI

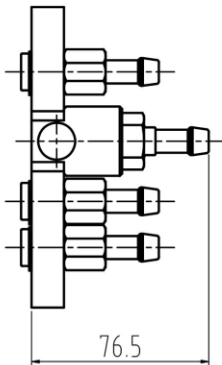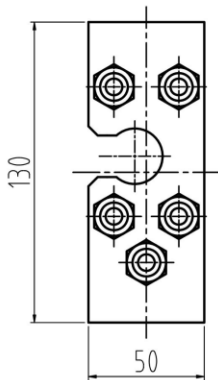


型号 Mould	规格描述 Specification description	零件号 Part-number
SMI206.06	配备6个8mm内径软管插座	SMI206.06.1808/JV
	配备6个10mm内径软管插座	SMI206.06.1810/JV

配备6个单向阀插座(3个回路)，带1/4" BSP或NPT内螺纹
Fitted with 6 shut-off sockets (3 circuits) threaded 1/4" BSP
or NPT female



组合板
SMI

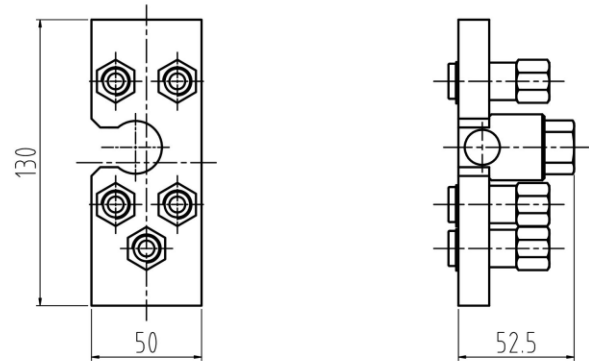

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI206.06	G1/4内螺纹	SMI206.06.1101/JV
	NPT1/4内螺纹	SMI206.06.1201/JV


模具侧
Mould side

SMI206模具侧固定组合板
SMI206 fixed multi-coupling plates on mould side

最多可接收6个1/4"-6mm通道的插头(3个回路)
Will receive upto 6 plugs of 1/4"-6mm passage ϕ (3 circuits)

固定板，配有一个用于锁定单向阀
Fixed plate supplied with 1 shut-off plug for locking and flow passage

SMI06插头:参见79到80
SMI06 plugs:see § 79to80

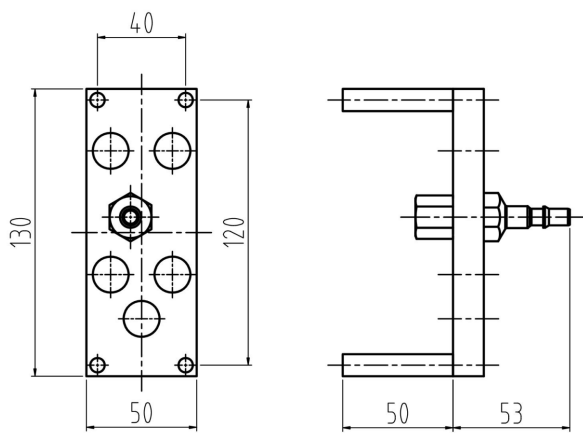

组合板
SMI


型号 Mould	规格描述 Specification description	零件号 Part-number
SMI206.06	可配6个插头 3进3出 无接头组合板	SMI206.06.6000
	配第79页SMI06.4101	SMI206.06.6101
	配第79页SMI06.4201	SMI206.06.6201
	配第79页SMI06.5101/JV	SMI206.06.7101/JV
	配第79页SMI06.5201/JV	SMI206.06.7201/JV

内置SMI06单向阀插座连接内径8mm或10mm的软管
Built-in SMI06 shut-off sockets for 8mm or 10mm inside ϕ hose connection

用于SMI206移动组合板(参见74)
Fitting on SMI206 mobile multi-coupling plates for press side (see § 74)




组合板
SMI

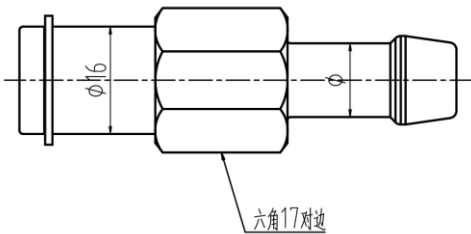

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI06	连接8mm内径软管插座	SMI06.2808/JV
	连接10mm内径软管插座	SMI06.2810/JV

内置SMI06单向阀插座，带1/4" BSP或NPT内螺纹
Built-in SMI06 shut-off sockets with 1/4" BSP or NPT female thread

用于SMI206移动组合板(参见75)
Fitting on SMI206 mobile multi-coupling plates for press side
(see § 75)

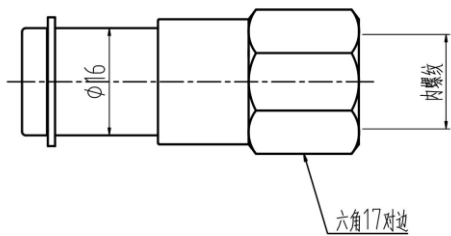

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI06	G1/4内螺纹	SMI06.2101/JV
	NPT1/4内螺纹	SMI06.2201/JV

SMI06 用于SMI206组合板的接头
SMI06 Joints for SMI206*


组合板配件
Multi-couplings fittings

SMI06带1/4" BSP或NPT内螺纹的直通插头或单向阀插头
SMI06 full flow plugs or shut-full plugs with 1/4" BSP or NPT female thread

用于模具侧的SMI206固定组合板(参见 76)
For SMI206 fixed multi-coupling plates on mould side (see § 76)




组合板
SMI

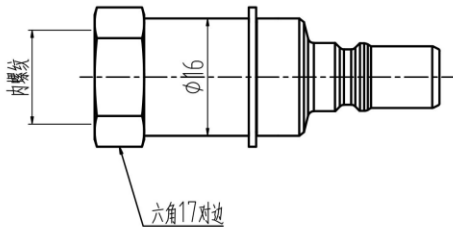

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI06	G1/4内螺纹,不带阀	SMI06.4101
	NPT1/4内螺纹,不带阀	SMI06.4201
	G1/4内螺纹,带阀	SMI06.5101/JV
	NPT1/4内螺纹,带阀	SMI06.5201/JV


90° 弯头配内径08mm或10mm软管-外螺纹1/4" BSP或NPT
90° elbows for flexible hose with 08mm or 10mm inside ϕ -male
1/4" BSP or NPT

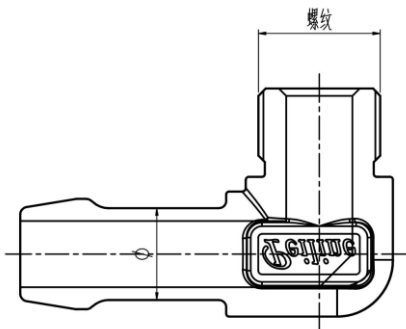

型号 Mould	规格描述 Specification description	零件号 Part-number
AF	G1/4外螺纹, $\Phi=8\text{mm}$	AF151.08/RE
	G1/4外螺纹, $\Phi=10\text{mm}$	AF151.10/RE
	NPT1/4外螺纹, $\Phi=8\text{mm}$	AF251.08/RE
	NPT1/4外螺纹, $\Phi=10\text{mm}$	AF251.10/RE

组合板
SMI

延长接头1/4" BSP-母1/4" BSP或NPT
Extenders male 1/4" BSP-female 1/4" BSP or NPT

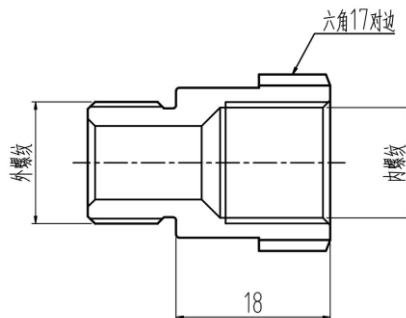

型号 Mould	规格描述 Specification description	零件号 Part-number
RMF	G1/4外螺纹-G1/4内螺纹	RMF151.101/LN
	NPT1/4外螺纹-NPT1/4内螺纹	RMF251.201/LN

SMI209多接头组合板(SMI209 Multi-joints)

6个接头(3个回路)组合板
6joints(3circuits)


设备侧
Press side

SMI209移动组合板
SMI209 multi-coupling plates on press side

装有6个SMI09单向阀插座(3个回路)，用于软管内径 $\phi 10\text{ mm}$ 或 $\phi 12\text{ mm}$
Fitted with 6 SMI09 shut-off sockets (3 circuits) for 10 mm or 12 mm inside ϕ hose connection




组合板
SMI

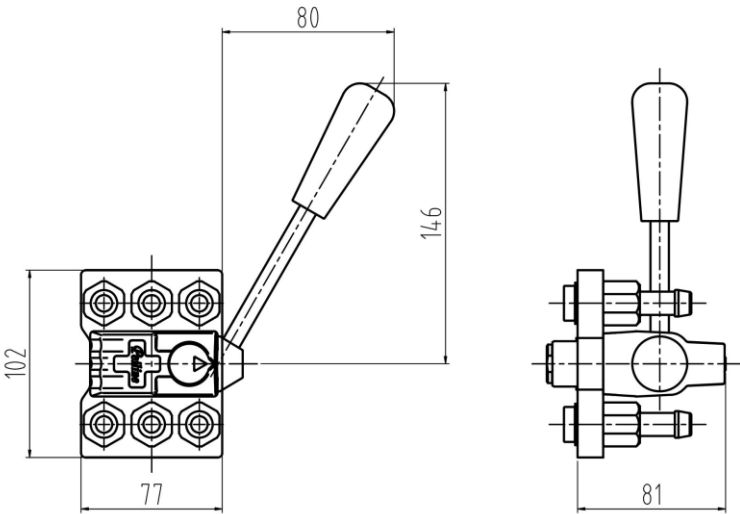

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.06	10mm内径软管插座	SMI209.06.1810/JV
	12mm内径软管插座	SMI209.06.1812/JV

配备6个SMI09单向阀插座(3个回路)，带G3/8或NPT3/8内螺纹
Fitted with 6 SMI09 shut-off sockets (3 circuits) threaded G3/8" or NPT3/8" female

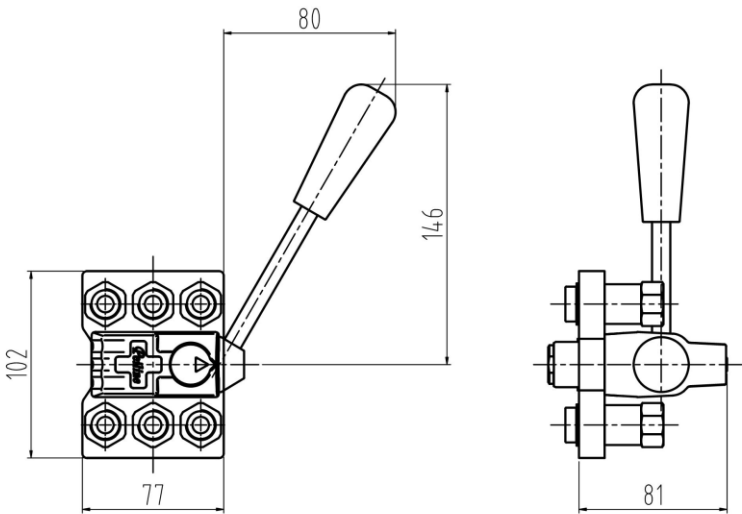

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.06	G3/8内螺纹	SMI209.06.1102/JV
	NPT3/8内螺纹	SMI209.06.1202/JV

模具侧
Mould side

SMI209模具侧固定组合板
SMI209 fixed multi-coupling plates on mould side


最多可安装6个SMI09插头
Will receive upto 6 SMI09 plugs

不带插头的固定板
Fixed plates supplied without plugs

SMI09插头: 参见107到109
SMI09 plugs: see § 107to109



组合板
SMI

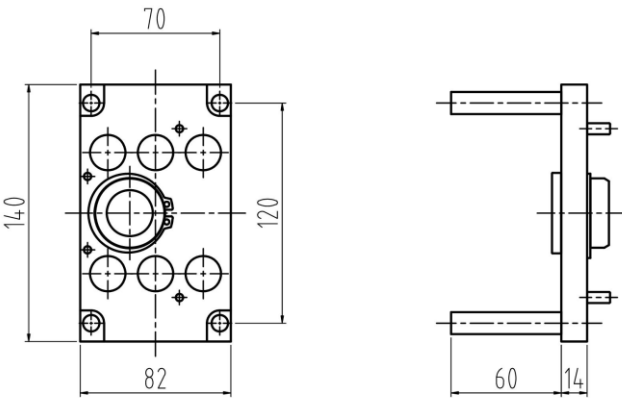


型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.06	可配6个插头 3进3出 无接头组合板	SMI209.06.6000
	配第107页SMI09.4102	SMI209.06.6102
	配第107页SMI09.4202	SMI209.06.6202
	配第107页SMI09.5102/JV	SMI209.06.7102/JV
	配第107页SMI09.5202/JV	SMI209.06.7202/JV

8个接头(4个回路)组合板
8 joints (4 circuits)

设备侧
Press side

SMI209移动组合板
SMI209 mobile multi-coupling plates on press side

装有8个SMI09单向阀插座(4个回路)，用于软管内径 $\phi 10\text{ mm}$ 或 $\phi 12\text{ mm}$
Fitted with 8 SMI09 shut-off sockets (4 circuits) for $\phi 10\text{ mm}$ or $\phi 12\text{ mm}$ inside hose connection

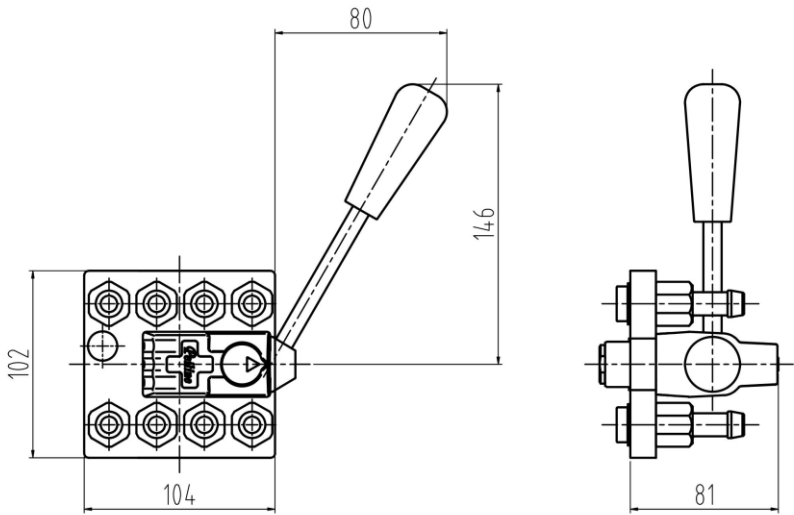

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.08	配备8个，SMI09 10mm内径软管插座	SMI209.08.1810/JV
	配备8个，SMI09 12mm内径软管插座	SMI209.08.1812/JV

模具侧
Mould side

SMI209模具侧固定板
SMI209 fixed multi-coupling plates on mould side


不带插头的固定板
Fixed plates supplied without plugs

最多可接收8个SMI09插头
Will receive upto 8 SMI09 plugs

SMI09插头: 参见107到109
SMI09 plugs: see § 107 to 109



组合板
SMI

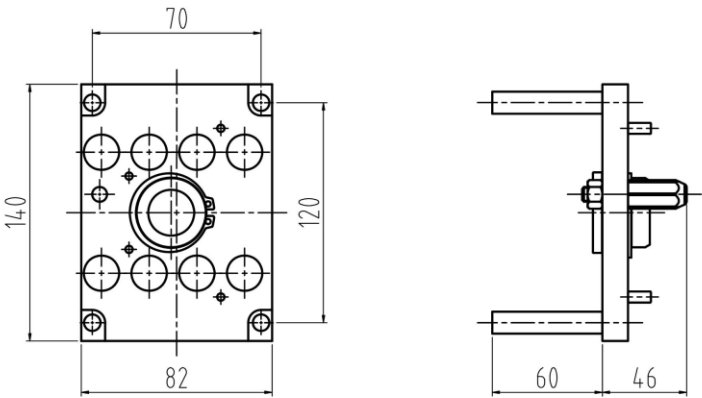


型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.08	可配8个插头 4进4出 无接头组合板	SMI209.08.6000
	配第107页SMI09.4102	SMI209.08.6102
	配第107页SMI09.4202	SMI209.08.6202
	配第107页SMI09.5102/JV	SMI209.08.7102/JV
	配第107页SMI09.5202/JV	SMI209.08.7202/JV

模具侧
Mould side

SMI209模具侧固定组合板
SMI209 fixed multi-coupling plates on mould side

配备10个SMI09全通插头或单向阀插头(5个回路)
Fitted with 10 SMI09 full plugs or shut-full plugs (5 circuits)

3/8" BSP 内螺纹侧连接
3/8" BSP female thread side connections

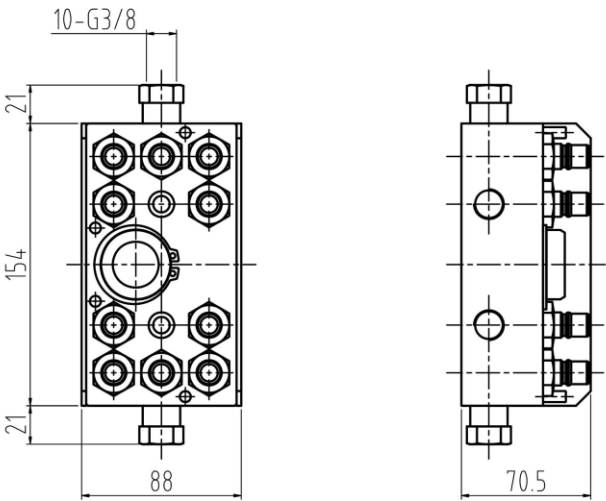

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.10	侧面配备10个G3/8内螺纹,顶面插头不带阀, 5进5出	SMI209.10.6102
	侧面配备10个G3/8内螺纹,顶面插头带阀, 5进5出	SMI209.10.7102/JV

10个接头(5个回路)组合板
10 joints (5 circuits)

设备侧
Press side


SMI209移动组合板
SMI209 mobile multi-coupling plates on press side

配备10个SMI09单向阀插座(5个回路)
Fitted with 10 SMI09 shut-off sockets (5 circuits)


对于peiline自锁聚氨酯软管，该软管的使用条件：
-最大工作压力=10 bar
-最高工作温度=90°C

For peiline self-lock polyurethane hose
conditions of use with this hose:
-Max. working pressure=10 bar
-Max. working temperature=90°C

其他软管:请咨询我们
For other hose: consult us

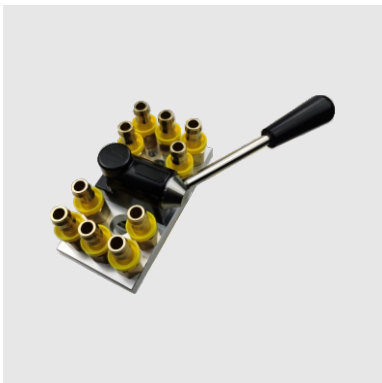

组合板
SMI

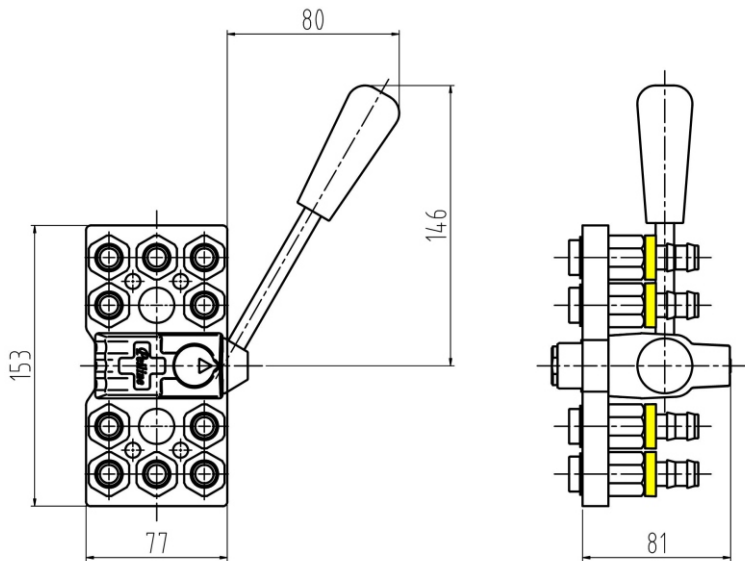



型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.10	配备10个，SMI09 10mm内径软管插座	SMI209.10.1810/CN/JV
	配备10个，SMI09 12mm内径软管插座	SMI209.10.1813/CN/JV

12个接头(6个回路)组合板
12 joints (6 circuits)

设备侧
Press side

SMI209移动组合板
SMI209 mobile multi-coupling plates on press side

装有12个SMI09单向阀插座(6个回路)，用于软管内径 $\phi 10\text{ mm}$ 或 $\phi 12\text{ mm}$
Fitted with 12 SMI09 shut-off sockets (6 circuits) for $\phi 10\text{ mm}$ or $\phi 12\text{ mm}$ inside hose connection

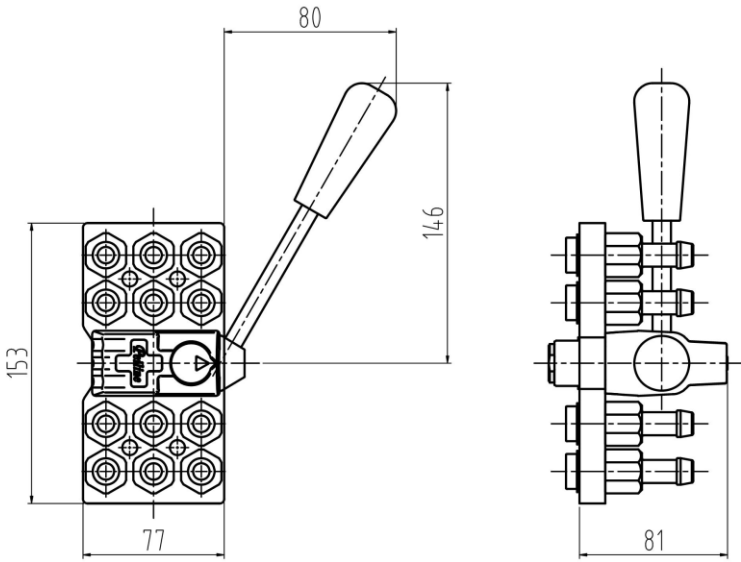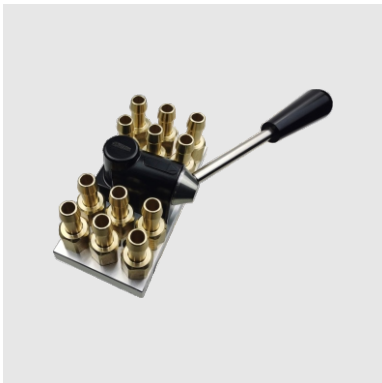

组合板
SMI


型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.12	配备12个，SMI09 10mm内径软管插座	SMI209.12.1810/JV
	配备12个，SMI09 12mm内径软管插座	SMI209.12.1812/JV

配备12个SMI09单向阀插座(6个回路)，带3/8" BSP或NPT内螺纹

Fitted with 12 SMI09 shut-off sockets (6 circuits) threaded 3/8" BSP or NPT female





组合板
SMI

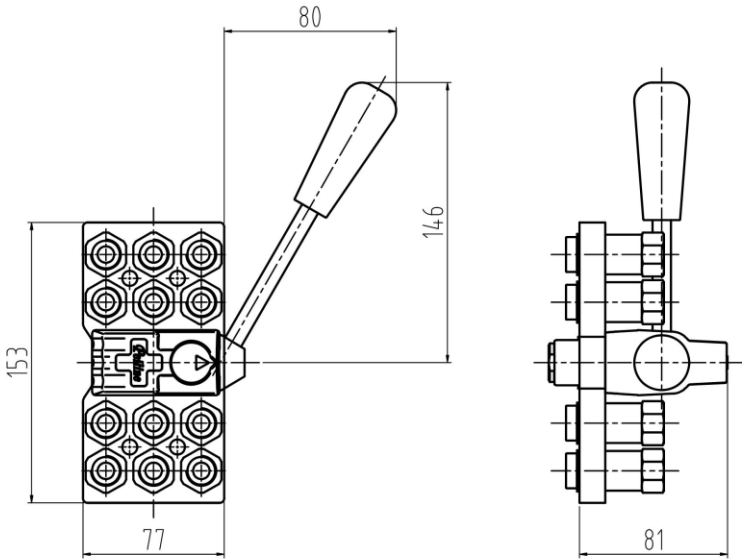

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.12	G3/8内螺纹	SMI209.12.1102/JV
	NPT3/8内螺纹	SMI209.12.1202/JV


配备12个SMI09单向阀(6个回路)，带M16*1.5外螺纹
Fitted with 12 SMI09 shut-off sockets (6 circuits) threaded male
M16*1.5

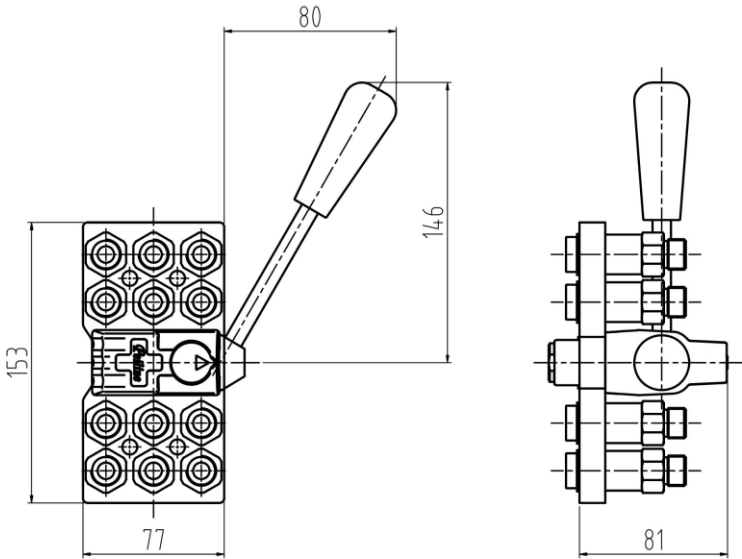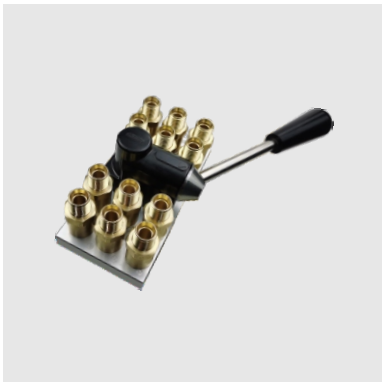

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.12	配备12个，M16×1.5外螺纹	SMI209.12.1416/JV

带中央进、出口回路-内螺纹G1
With centralized inlet and outlet circuits-female G1"

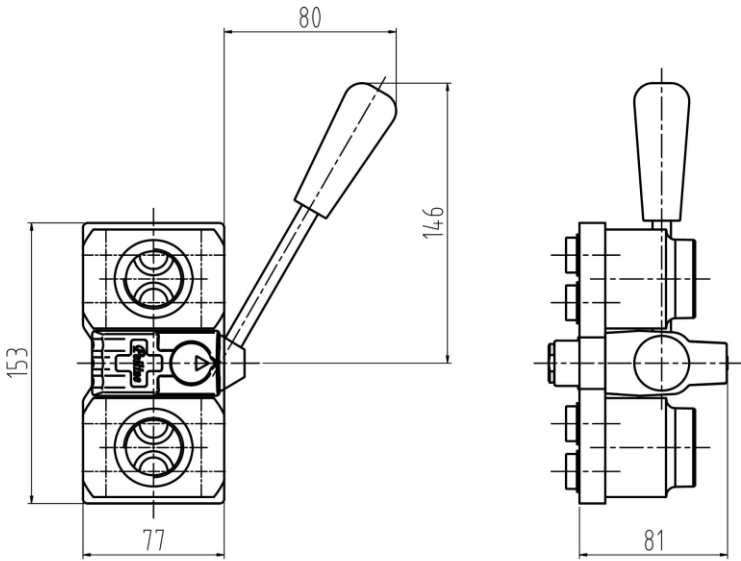


组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.12	带中央进、出口回路-G1内螺纹	SMI209.12.1105/JV

具有集中的入口和出口回路 -内螺纹G1/2，用于2个回路 -内螺纹G3/4
用于4个回路



with centralized inlet and outlet circuits
-female 1/2"BSP for 2 circuits
-female 3/4"BSP for 4 circuits

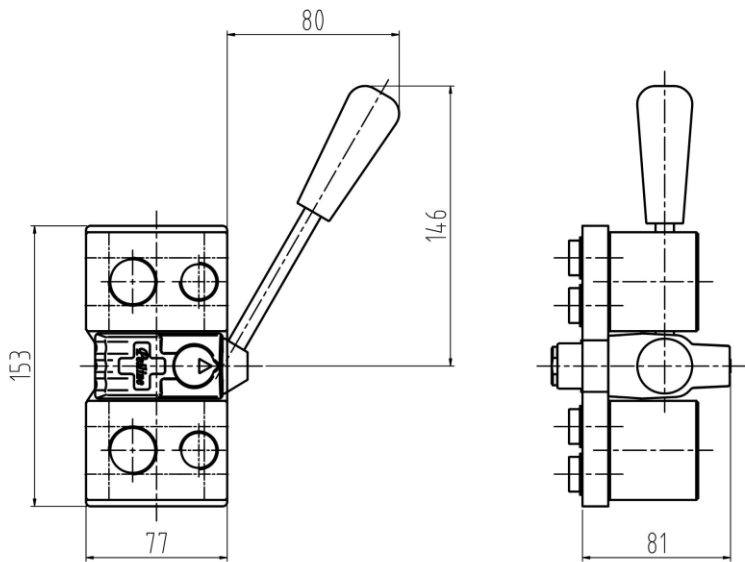

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.12	母G1/2,用于2个回路,母G3/4, 用于4个回路	SMI209.12.1104/JV

装有12个SMI09单向阀插座(6个回路)，用于软管内径 $\phi 10\text{ mm}$ 或 $\phi 12\text{ mm}$
Fitted with 12 SMI09 shut-off sockets (6 circuits) for $\phi 10\text{ mm}$ or $\phi 12\text{ mm}$ inside hose connection

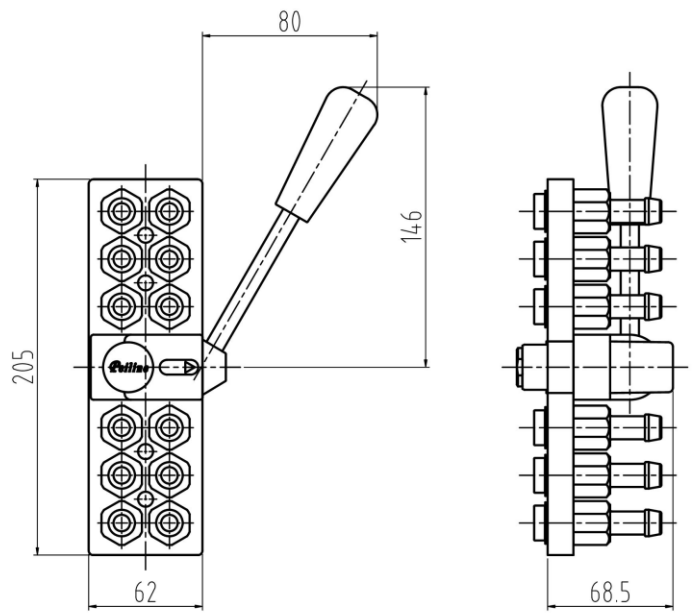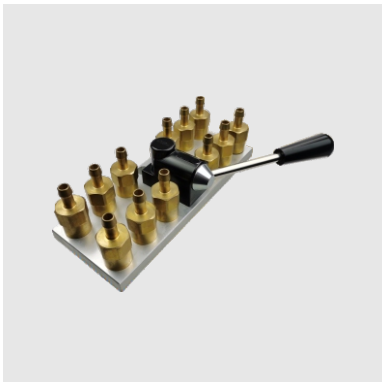


组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.12	配备12个，SMI09 10mm内径软管插座	SMI209.12.1810/JV/B02
	配备12个，SMI09 12mm内径软管插座	SMI209.12.1812/JV/B02

带中央进、出口回路-内螺纹G1



With centralized inlet and outlet circuits-female G1

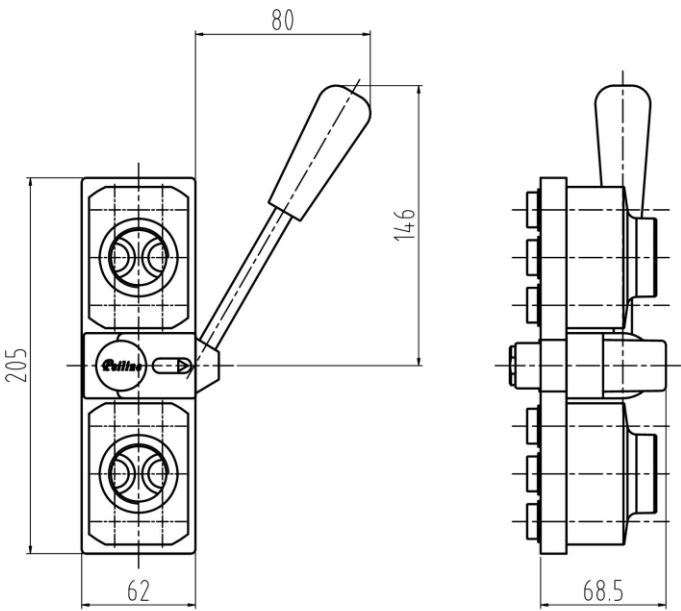

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.12	带中央进、出口回路-G1内螺纹	SMI209.12.1105/JV/B02

配备12个SMI09单向阀(6个回路)，带M16*1.5外螺纹
Fitted with 12 SMI09 shut-off sockets (6 circuits) threaded male
M16*1.5

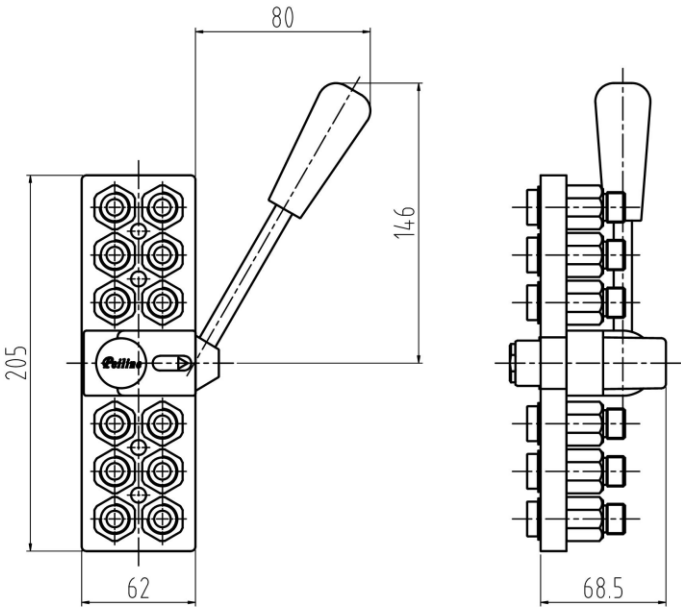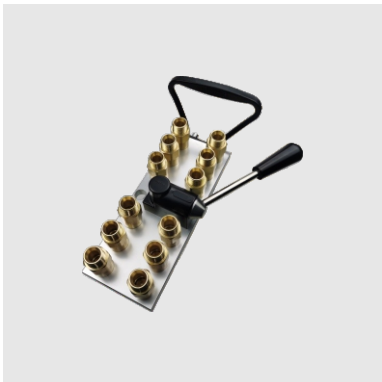

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.12	配备12个，M16×1.5外螺纹	SMI209.12.1416/JV/B02


模具侧
Mould side

SMI209模具侧固定板
SMI209 fixed multi-coupling plates on mould side

不带插头的固定板
Fixed plates supplied without plugs

最多可接收12个SMI09插头
Will receive upto 12 SMI09 plugs

SMI09插头: 参见107到109
SMI09 plugs: see § 107 to 109

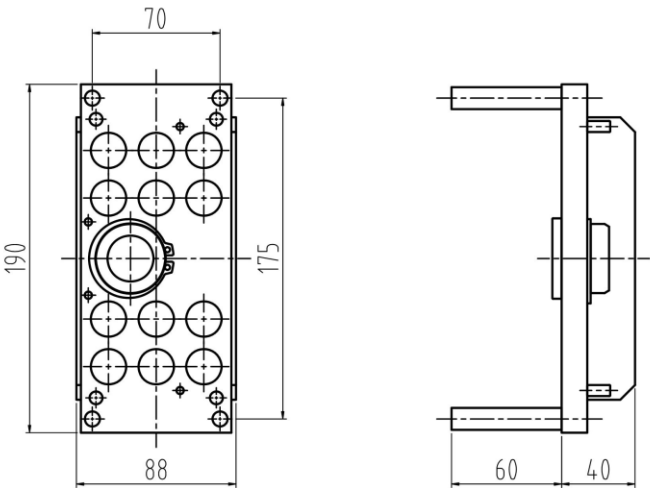

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.12	可配12个插头 6进6出 无接头组合板	SMI209.12.6000/L
	配第107页SMI09.4102	SMI209.12.6102/L
	配第107页SMI09.4202	SMI209.12.6202/L
	配第107页SMI09.5102/JV	SMI209.12.7102/JV/L
	配第107页SMI09.5202/JV	SMI209.12.7202/JV/L


不带插头的固定板
Fixed plates supplied without plugs

最多可接收12个SMI09插头
Will receive upto 12 SMI09 plugs

SMI09插头: 参见107到109
SMI09 plugs: see § 107to109



组合板
SMI

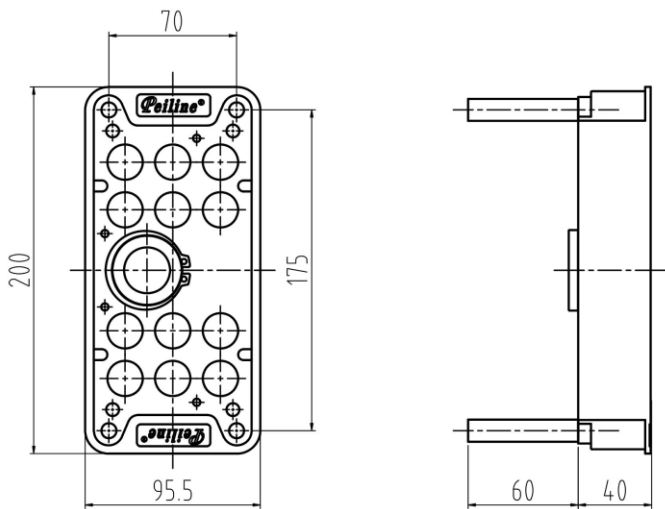

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.12	可配12个插头 6进6出 无接头组合板	SMI209.12.6002
	配第107页SMI09.4102	SMI209.12.6102
	配第107页SMI09.4202	SMI209.12.6202
	配第107页SMI09.5102/JV	SMI209.12.7102/JV
	配第107页SMI09.5202/JV	SMI209.12.7202/JV

不带插头的固定板


Fixed plates supplied without plugs

最多可接收12个SMI09插头

Will receive upto 12 SMI09 plugs

SMI09插头: 参见107到109

SMI09 plugs: see § 107 to 109

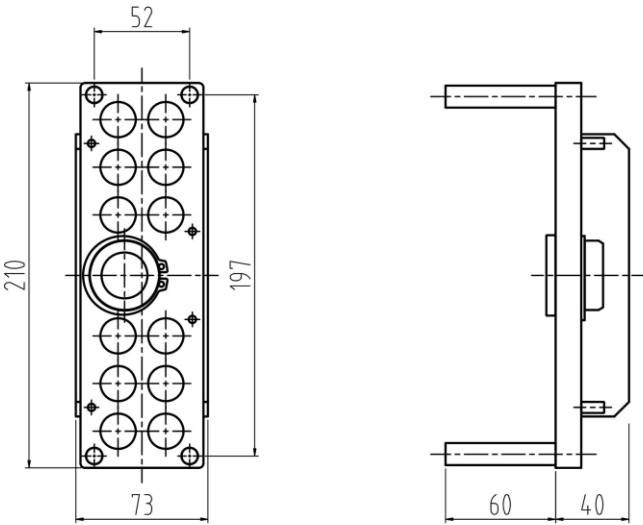

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.12	可配12个插头 6进6出 无接头组合板	SMI209.12.6000/L/B02
	配第107页SMI09.4102	SMI209.12.6102/L/B02
	配第107页SMI09.4202	SMI209.12.6202/L/B02
	配第107页SMI09.5102/JV	SMI209.12.7102/JV/L/B02
	配第107页SMI09.5202/JV	SMI209.12.7202/JV/L/B02

16个接头(8个回路)组合板
16 joints (8 circuits)


设备侧
Press side

SMI209移动组合板
SMI209 mobile multi-coupling plates on press side

装有16个SMI09单向阀插座(10个回路)，用于软管内径 $\phi 10\text{ mm}$ 或 $\phi 12\text{ mm}$
Fitted with 16 SMI09 shut-off sockets (10 circuits) for $\phi 10\text{ mm}$ or $\phi 12\text{ mm}$ inside hose connection



组合板
SMI

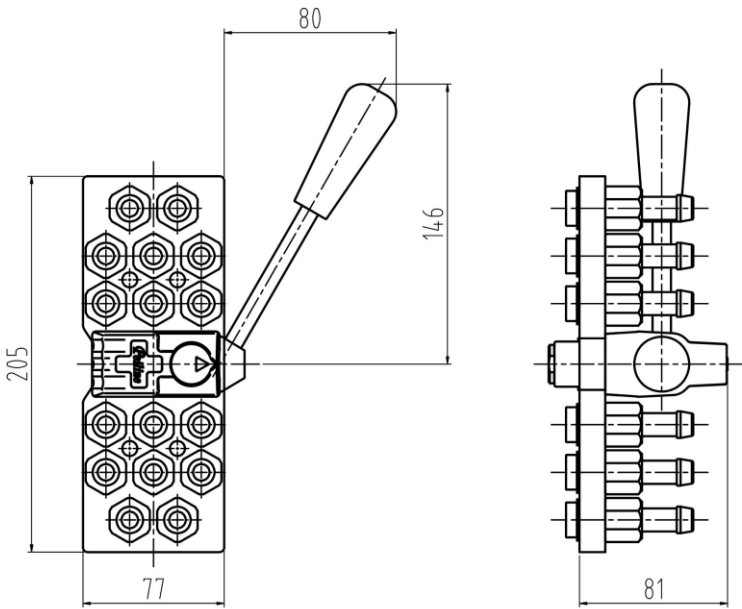

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.16	配备16个，SMI09 10mm内径软管插座	SMI209.16.1810/JV
	配备16个，SMI09 12mm内径软管插座	SMI209.16.1812/JV


模具侧
Mould side

SMI209模具侧固定板
SMI209 fixed multi-coupling plates on mould side

不带插头的固定板
Fixed plates supplied without plugs

最多可接收16个SMI09插头
Will receive upto 16 SMI09 plugs

SMI09插头: 参见107到109
SMI09 plugs: see § 107 to 109

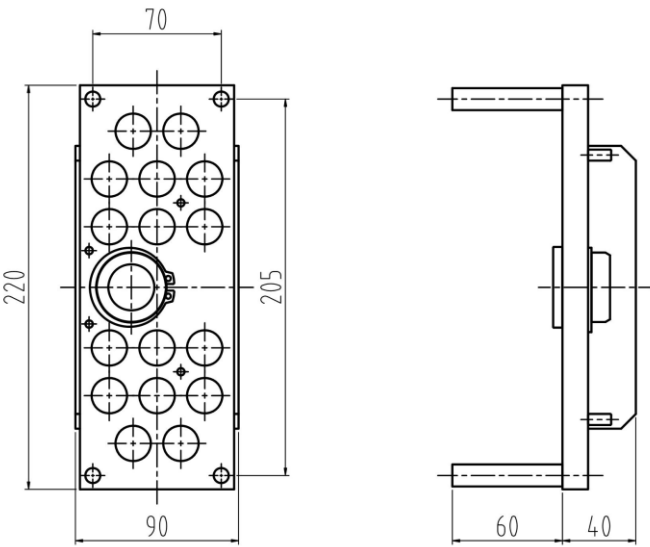

组合板
SMI


型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.16	可配16个插头 8进8出 无接头组合板	SMI209.16.6000
	配第107页SMI09.4102	SMI209.16.6102
	配第107页SMI09.4202	SMI209.16.6202
	配第107页SMI09.5102/JV	SMI209.16.7102/JV
	配第107页SMI09.5202/JV	SMI209.16.7202/JV

20个接头(10个回路)组合板
20 joints (10 circuits)


设备侧
Press side

SMI209移动组合板
SMI209 multi-coupling plates on press side

装有20个SMI09单向阀插座(10个回路)，用于软管内径 $\phi 10\text{ mm}$
或 $\phi 12\text{ mm}$
Fitted with 20 SMI09 shut-off sockets (10 circuits) for $\phi 10\text{ mm}$
or $\phi 12\text{ mm}$ inside hose connection


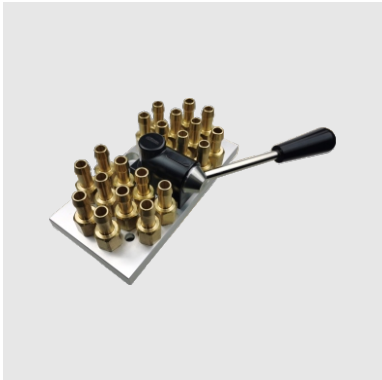


组合板
SMI

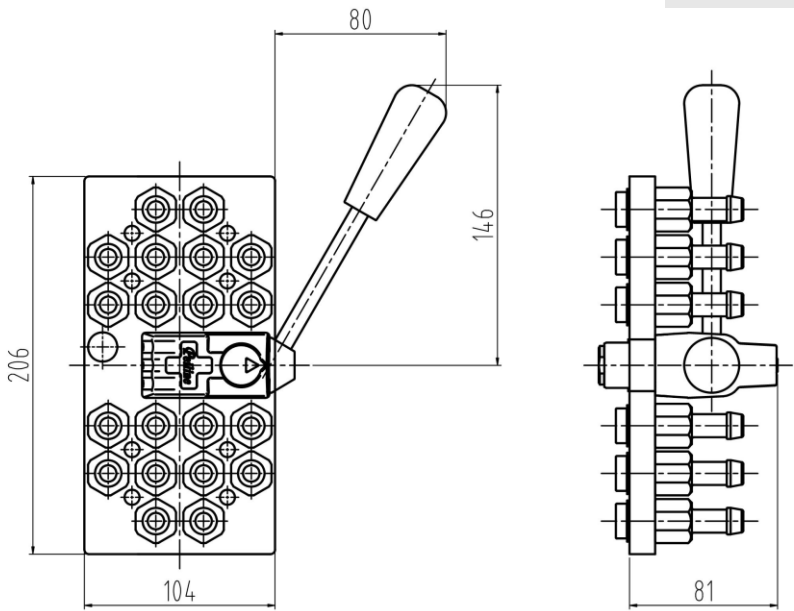

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.20	配备20个，SMI09 10mm内径软管插座	SMI209.20.1810/JV
	配备20个，SMI09 12mm内径软管插座	SMI209.20.1812/JV

配备20个SMI09单向阀插座，带G3/8或NPT3/8内螺纹
Fitted with 20 SMI09 shut-off sockets threaded G3/8 or NPT3/8 female

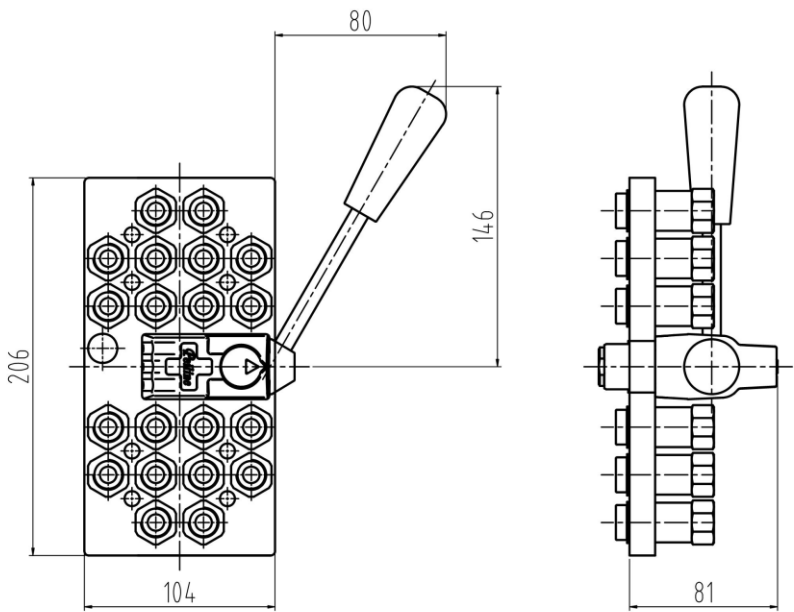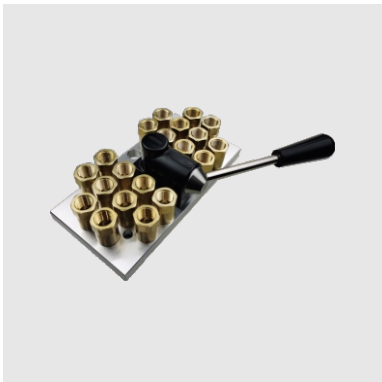


组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.20	G3/8内螺纹	SMI209.20.1102/JV
	NPT3/8内螺纹	SMI209.20.1202/JV

带中央进、 出口回路一内螺纹G1 1/4
With centralized inlet and outlet circuits-female G1 1/4



组合板
SMI

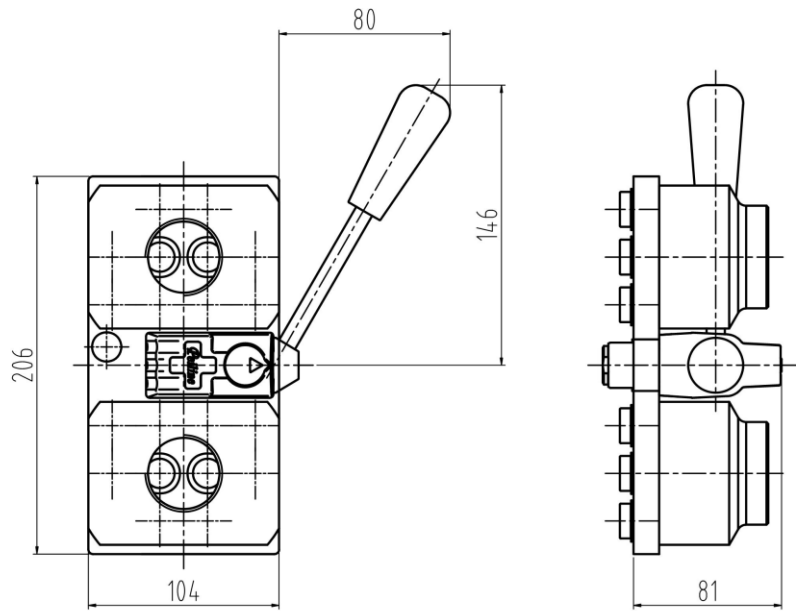

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.20	带中央进、出口回路-G1 1/4内螺纹	SMI209.20.1106/JV


模具侧
Mould side

SMI209模具侧固定板
SMI209 fixed multi-coupling plates on mould side

不带插头的固定板
Fixed plates supplied without plugs

最多可接收20个SMI09插头
Will receive upto 20 SMI09 plugs

SMI09插头: 参见107到109
SMI09 plugs: see § 107 to 109

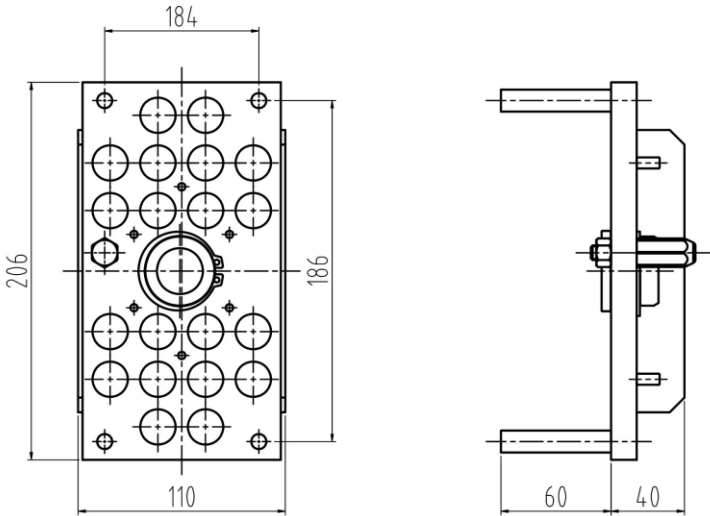

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI209.20	可配20个插头 10进10出 无接头组合板	SMI209.20.6000
	配第107页SMI09.4102	SMI209.20.6102
	配第107页SMI09.4202	SMI209.20.6202
	配第107页SMI09.5102/JV	SMI209.20.7102/JV
	配第107页SMI09.5202/JV	SMI209.20.7202/JV

SMI09单向阀插座连接内径10mm或12mm的软管


Built-in SMI09 shut-off sockets for 10mm or 12mm inside ϕ hose connection

用于SMI209移动组合板(参见81、84、88、93、99和101)

Fitting on SMI209 mobile multi-coupling plates for press side
(see § 81、84、88、93、99 and 101)




组合板
SMI

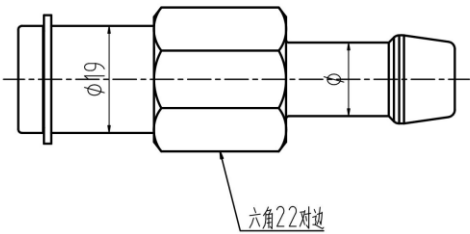

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI09	连接10mm内径软管	SMI09.2810/JV
	连接12mm内径软管	SMI09.2812/JV

SMI09单向阀插座，带G3/8或NPT3/8内螺纹
Built-in SMI09 shut-off sockets with G3/8 or NPT3/8 female thread

用于SMI209移动组合板(参见 82、89和102)
Fitting on SMI209 mobile multi-coupling plates for press side
(see § 82、89and102)

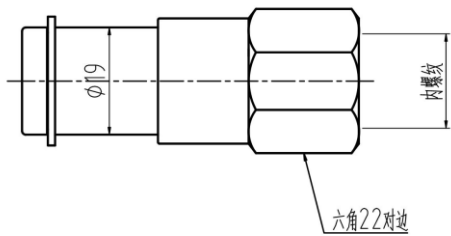

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI09	G3/8内螺纹	SMI09.2102/JV
	NPT3/8内螺纹	SMI09.2202/JV

SMI09 用于SMI209组合板的接头

SMI09 Joints for SMI209*

组合板配件


Multi-couplings fittings

SMI09带G3/8或NPT3/8内螺纹的直通插头或单向阀插头

SMI09 full flow plugs shut-full flow plugs or with G3/8 or NPT3/8 female thread

用于模具侧的SMI209固定组合板(参见 83、85、96、97、98、100和104)


For SMI209 fixed multi-coupling plates on mould side
(see § 83、85、96、97、98、100和104)

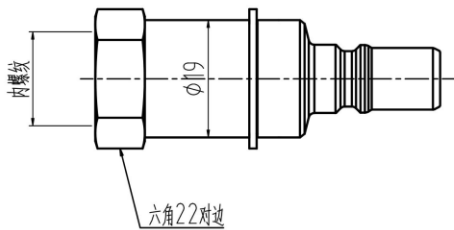

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI09	G3/8内螺纹,不带阀	SMI09.4102
	NPT3/8内螺纹,不带阀	SMI09.4202
	G3/8内螺纹,带阀	SMI09.5102/JV
	NPT3/8内螺纹,带阀	SMI09.5202/JV


90° 弯头配内径10mm或12mm软管-外螺纹G3/8或NPT3/8
90° elbows for flexible hose with 10mm or 12mm inside ϕ -male
G3/8 or NPT3/8

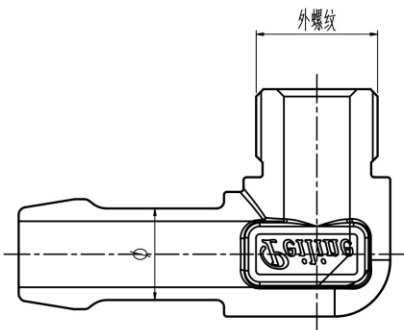

型号 Mould	规格描述 Specification description	零件号 Part-number
AF	G3/8外螺纹, $\Phi=10\text{mm}$	AF152.10/RE
	G3/8外螺纹, $\Phi=12\text{mm}$	AF152.12/RE
	NPT3/8外螺纹, $\Phi=10\text{mm}$	AF252.10/RE
	NPT3/8外螺纹, $\Phi=12\text{mm}$	AF252.12/RE

延长接头外螺纹G3/8或NPT3/8-内螺纹G3/8或NPT3/8
Extenders male G3/8 or NPT3/8-female G3/8" or NPT3/8

组合板
SMI

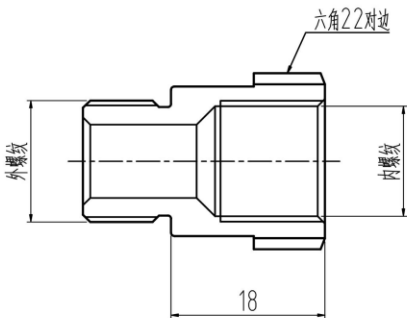


尺寸18可增长, 增长量为L, 零件号后加/L, 如RMF152.102/L5
Size 18 can be increased by L, plus/L after part number, such as RMF152.102/L5

型号 Mould	规格描述 Specification description	零件号 Part-number
RMF	G3/8外螺纹-G3/8内螺纹	RMF152.102/LN
	NPT3/8外螺纹-NPT3/8内螺纹	RMF252.202/LN

连接铁氟龙管直转接头

Direct swivel joint for connected teflon pipes

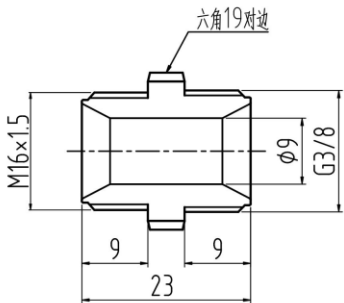


型号 Mould	规格描述 Specification description	零件号 Part-number
SZ812	G3/8外螺纹-M16×1.5外螺纹/内凹	SZ812/16×1.5/G3/8

连接铁氟龙管90° 转接头

Connect the teflon pipe 90 swivel



组合板
SMI

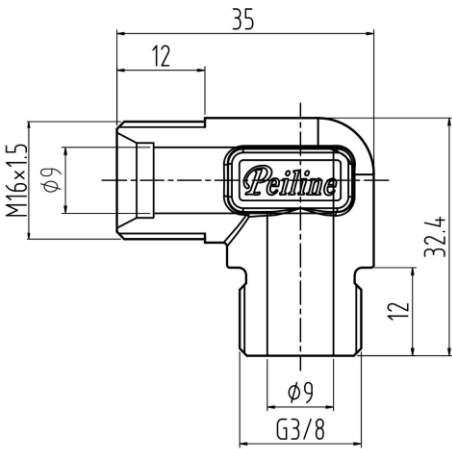

型号 Mould	规格描述 Specification description	零件号 Part-number
SZ812	G3/8外螺纹-M16×1.5外螺纹/内凹/90°	SZ812/16×1.5/G3/8/90

SMI209组合板固定挂具
Support plate SMI209

用于带有6、10、12或20个插座的SMI209移动式组合板
For SMI209 mobile multi-coupling plates with 6, 10, 12 or 20 Sockets

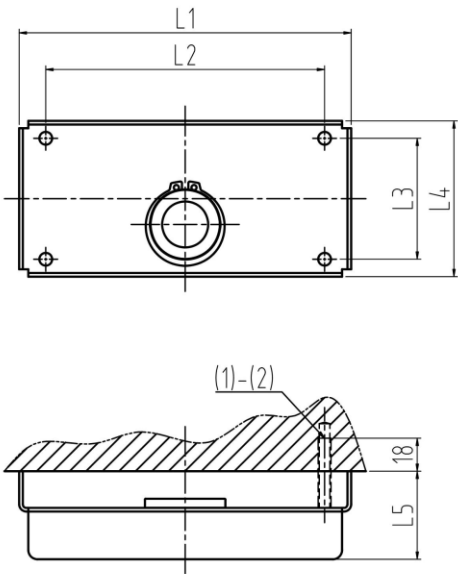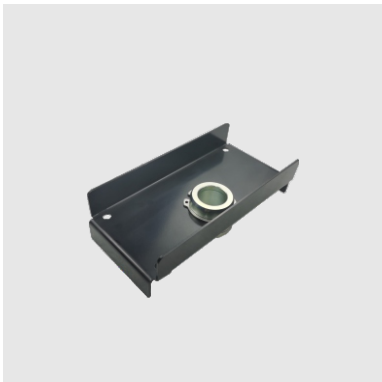

组合板
SMI

- (1) 4bores M6-6H/N 003.112.93
- (2) 4bores M8-6H/SMI209.20.1090

型号 Mould	尺寸 Dimensions(mm)					零件号 Part-number
	A	B	C	D	E	
SMI209	181	152	66	85	48	SMI209.12.8900 (N003.112.93)
	245	220	84	110	48	SMI209.20.1090


SMI212多接头组合板(SMI212 Multi-joints)

12个接头(6个回路)
12 joints (6 circuits)


设备侧
Press side

SMI212移动组合板
SMI212 mobile multi-coupling plates on press side

装有12个SMI12单向阀(6个回路)，用于 ϕ 软管内径12 mm或16 mm
Fitted with 12 SMI12 shut-off sockets (6 circuits) for 12 mm or 16 mm inside ϕ hose connection


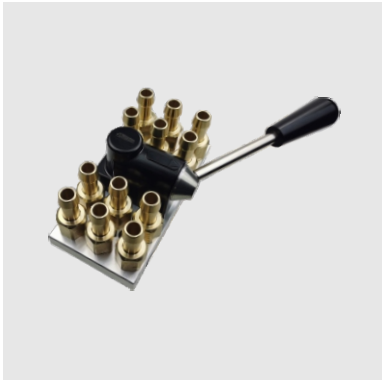


组合板
SMI

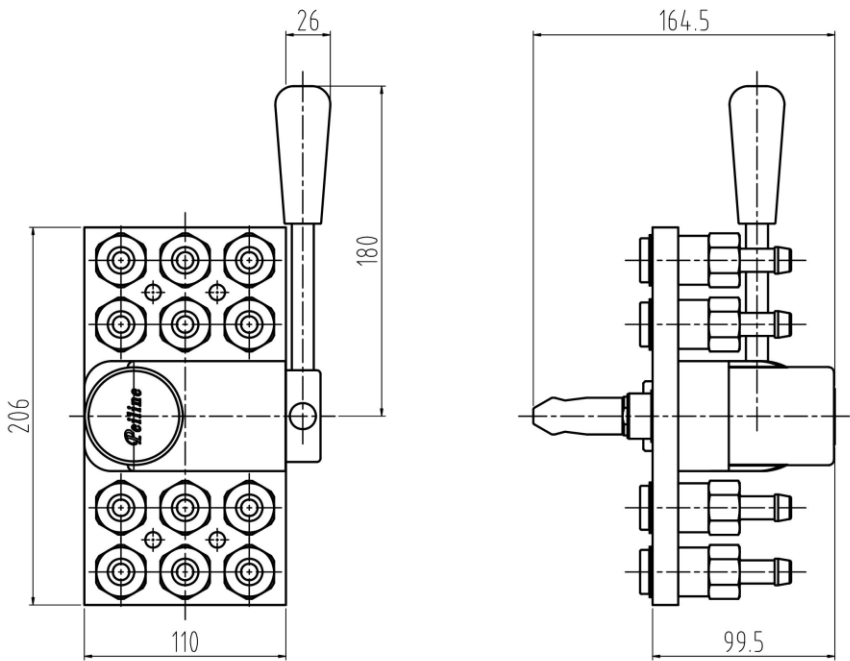

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI212.12	配备12个，SMI12 12mm内径软管插座	SMI212.12.1812/JV
	配备12个，SMI12 16mm内径软管插座	SMI212.12.1816/JV


配备12个SMI12单向阀(6个回路)，带1/2" BSP或NPT内螺纹
Fitted with 12 SMI12 shut-off sockets (6 circuits) threaded 1/2" BSP or NPT female

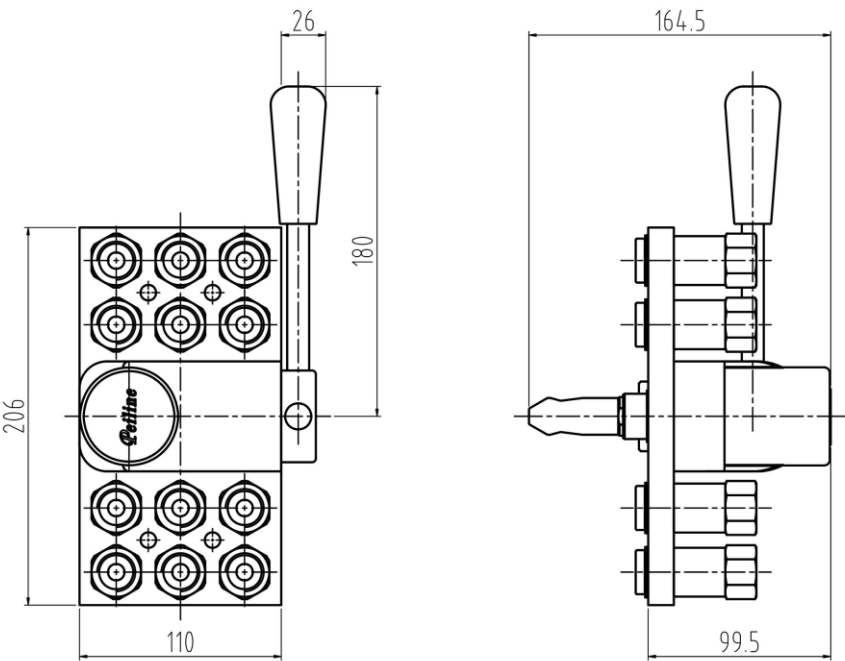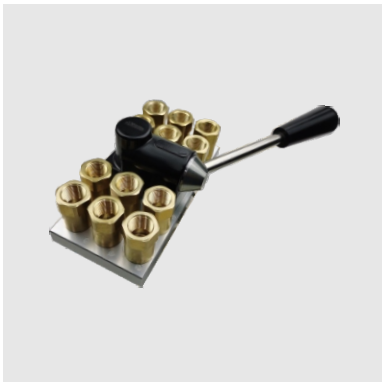

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI212.12	G1/2内螺纹	SMI212.12.1103/JV
	NPT1/2内螺纹	SMI212.12.1203/JV



配备12个SMI12单向阀(6个回路)，带1/2" BSP或NPT内螺纹
Fitted with 12 SMI12 shut-off sockets (6 circuits) threaded 1/2" BSP or NPT female

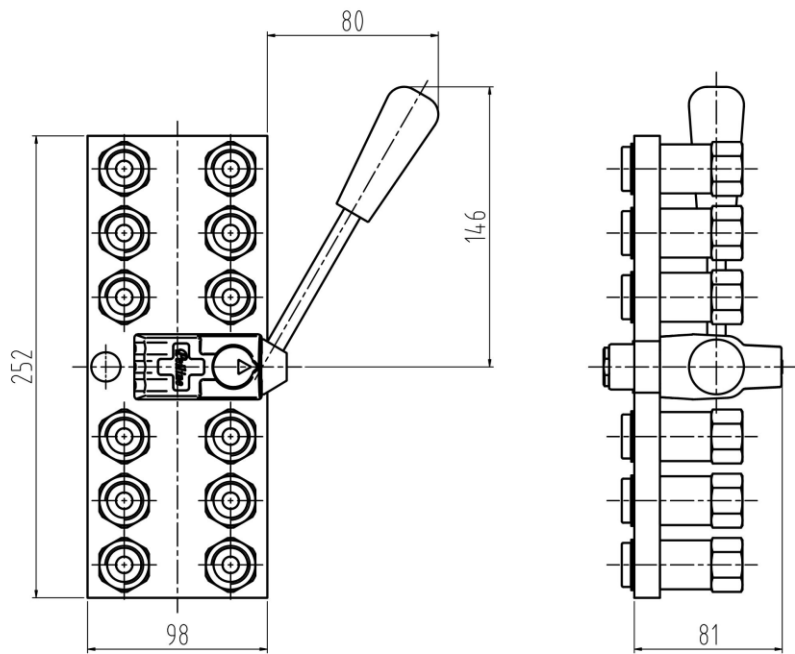

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI212.12	G1/2内螺纹	SMI212.12.1103/JV/B02
	NPT1/2内螺纹	SMI212.12.1203/JV/B02

配备12个SMI12单向阀(6个回路)，带M22*1.5外螺纹
Fitted with 12 SMI12 shut-off sockets (6 circuits) threaded male
M22*1.5

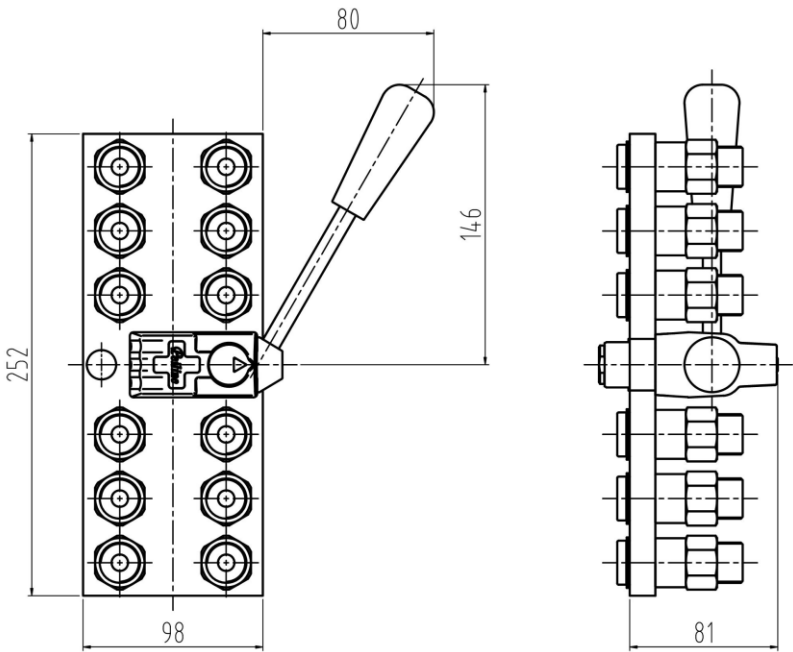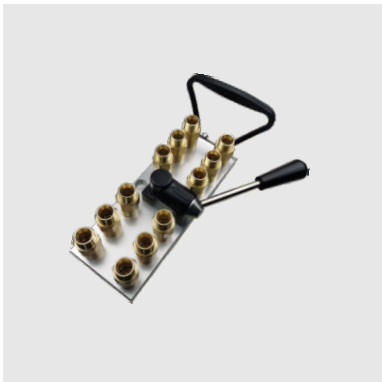


组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI212.12	M22×1.5外螺纹	SMI212.12.1422/JV/B02

SMI212多接头组合板
SMI212 Multi-joints

20个接头(10个回路)
20 joints (10 circuits)


设备侧
Press side

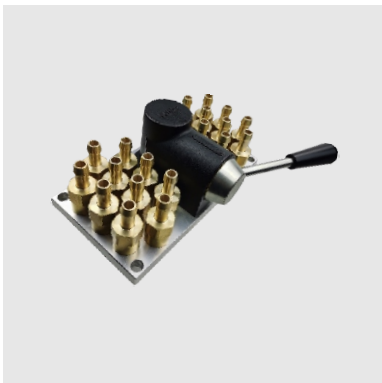

SMI212移动组合板
SMI212 mobile multi-coupling plates on press side



装有20个SMI12单向阀(10个回路)，用于 ϕ 软管内径12 mm或16 mm
Fitted with 20 SMI12 shut-off sockets (10 circuits) for 12 mm or 16 mm inside ϕ hose connection

组合板
SMI

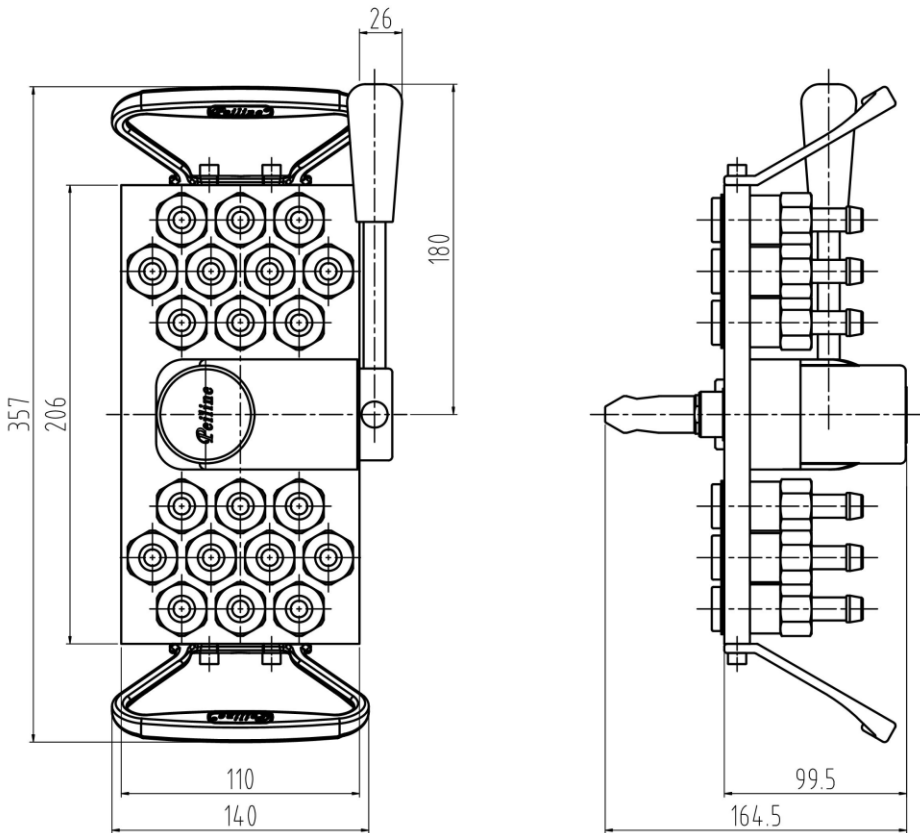

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI212.20	配备20个，SMI12 12mm内径软管插座	SMI212.20.1812/JV
	配备20个，SMI12 16mm内径软管插座	SMI212.20.1816/JV

配备20个SMI12单向阀(10个回路)，带1/2" BSP或NPT内螺纹
Fitted with 20 SMI12 shut-off sockets (10 circuits) threaded 1/2" BSP or NPT female

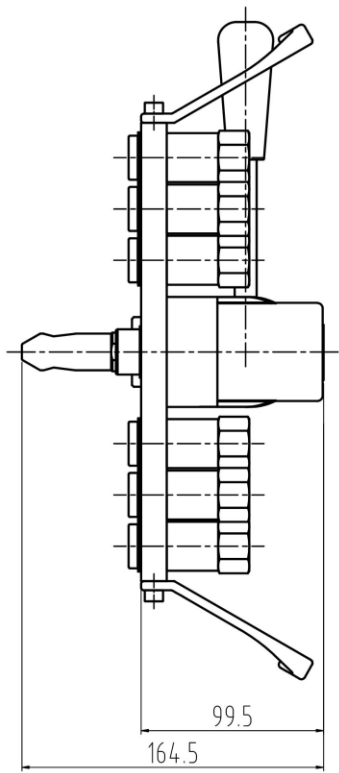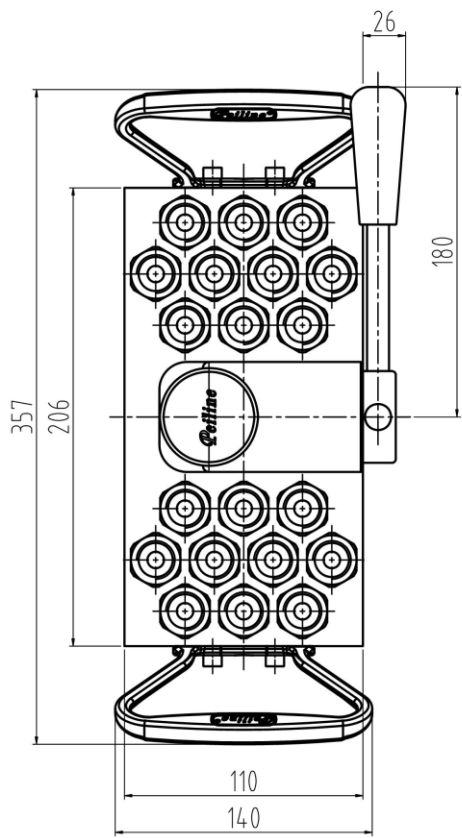

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI212.20	G1/2内螺纹	SMI212.20.1103/JV
	NPT1/2内螺纹	SMI212.20.1203/JV

模具侧
Mould side

SMI212模具侧固定组合板
SMI212 fixed multi-coupling plates on mould side


最多可接收12个SMI12插头(6个回路)
Will receive upto 12 SMI12 plugs (6circuits)

不带插头的固定板
Fixed plates supplied without plugs

SMI12插头: 参见 122到123
SMI12 plugs: see § 122 to 123



组合板
SMI

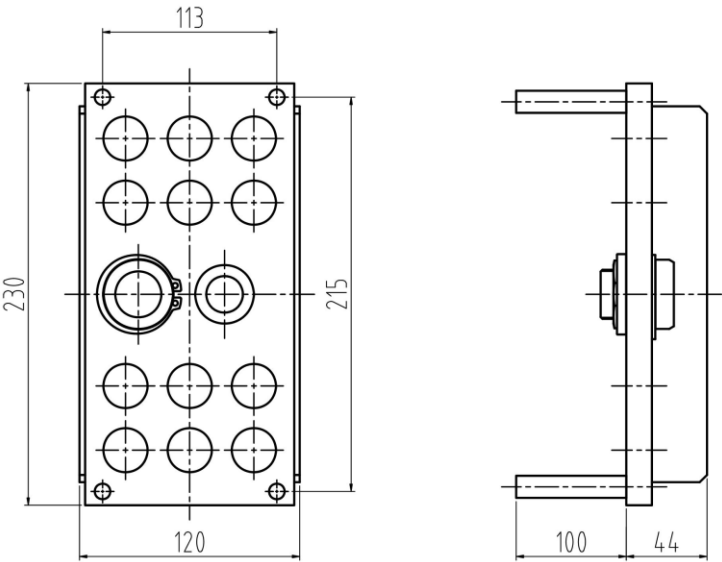


型号 Mould	规格描述 Specification description	零件号 Part-number
SMI212.12	可配12个插头 6进6出 无接头组合板	SMI212.12.6000
	配第122页SMI12.4103	SMI212.12.6103
	配第122页SMI12.4203	SMI212.12.6203
	配第122页SMI12.5103/JV	SMI212.12.7103/JV
	配第122页SMI12.5203/JV	SMI212.12.7203/JV

最多可接收12个SMI12插头(6个回路)
Will receive upto 12 SMI12 plugs (6circuits)

不带插头的固定板
Fixed plates supplied without plugs

SMI12插头: 参见 122到123
SMI12 plugs: see § 122 to 123

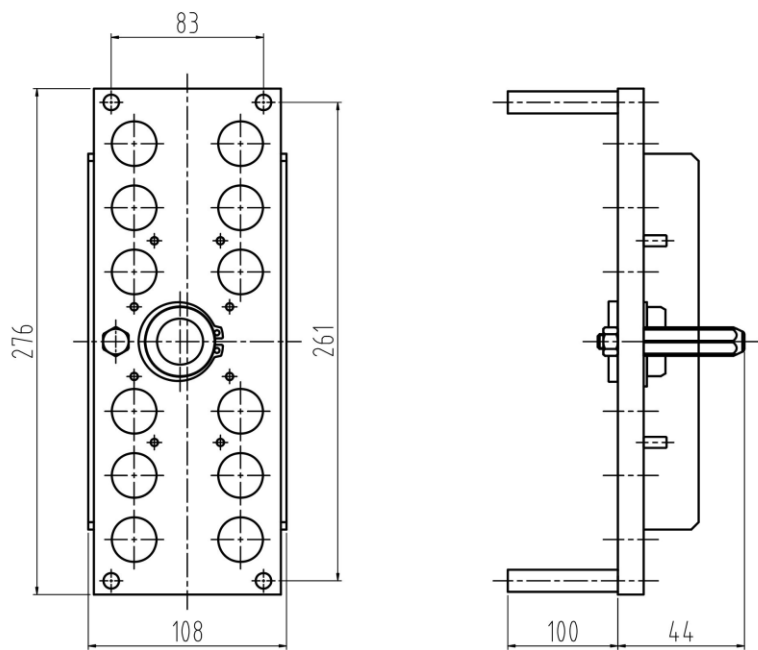

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI212.12	可配12个插头 6进6出 无接头组合板	SMI212.12.6000/B02
	配第122页SMI12.4103	SMI212.12.6103/B02
	配第122页SMI12.4203	SMI212.12.6203/B02
	配第122页SMI12.5103/JV	SMI212.12.7103/JV/B02
	配第122页SMI12.5203/JV	SMI212.12.7203/JV/B02


最多可接收20个SMI12插头(10个回路)
Will receive upto 20 SMI12 plugs (10circuits)

不带插头的固定板
Fixed plates supplied without plugs

SMI12插头:参见 122到123
SMI12 plugs:see § 122 to123



组合板
SMI

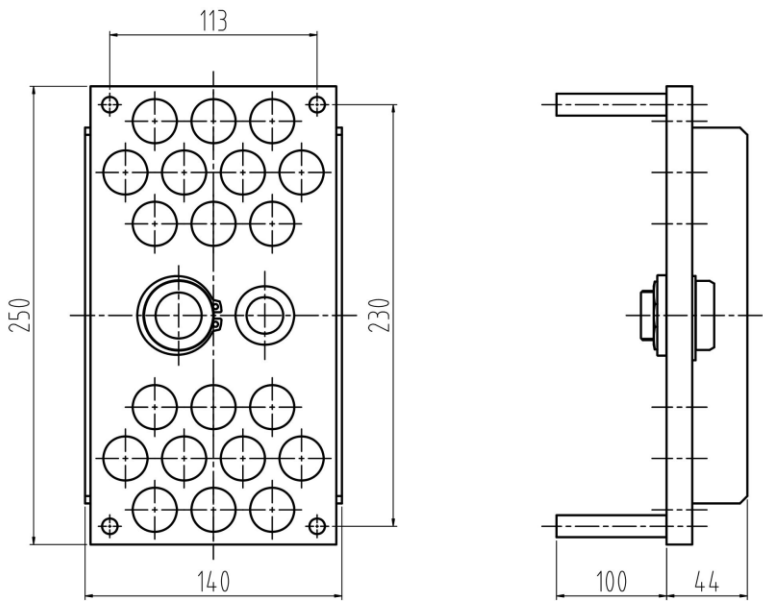


型号 Mould	规格描述 Specification description	零件号 Part-number
SMI212.20	可配20个插头 10进10出 无接头组合板	SMI212.20.6000
	配第122页SMI12.4103	SMI212.20.6103
	配第122页SMI12.4203	SMI212.20.6203
	配第122页SMI12.5103/JV	SMI212.20.7103/JV
	配第122页SMI12.5203/JV	SMI212.20.7203/JV

内置SMI12单向阀连接内径16mm的软管

Built-in SMI12 shut-off sockets for 16mm inside ϕ hose connection

用于SMI212移动组合板(参见111到115)

Fitting on SMI212 mobile multi-coupling plates for press side
(see § 111 and 115)

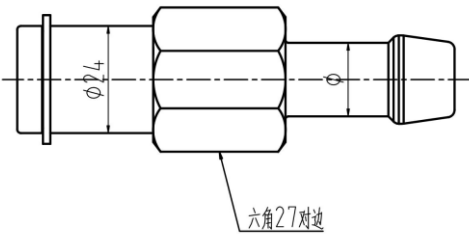


组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI12	连接16mm内径软管	SMI12.2816/JV

内置SMI12单向阀，带1/2" BSP或NPT内螺纹
Built-in SMI12 shut-off sockets with 1/2" BSP or NPT female thread


用于SMI212移动组合板(参见 112、113和116)
Fitting on SMI212 mobile multi-coupling plates for press side
(see § 112、113and116)

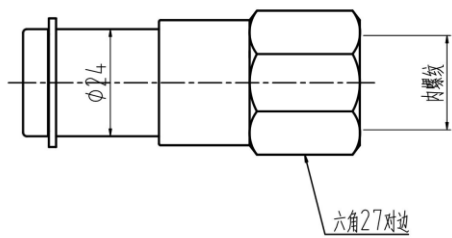

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI12	G1/2内螺纹	SMI12.2103/JV
	NPT1/2内螺纹	SMI12.2203/JV

组合板
SMI

用于SMI212移动组合板(参见 114)
Fitting on SMI212 mobile multi-coupling plates for press side
(see § 114)

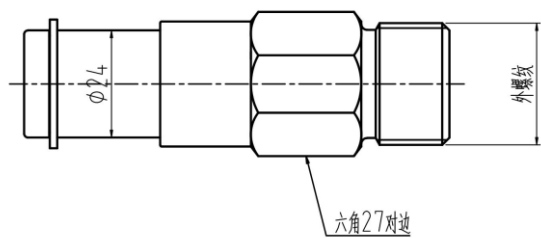

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI12	M22×1.5外螺纹	SMI12.2422/JV

SMI12 用于SMI212组合板的接头

SMI12 Joints for SMI212*

组合板配件

Multi-couplings fittings

SMI12带1/2" BSP或NPT内螺纹的直通插头或单向阀插头


SMI12 full flow plugs or shut-full plugs with 1/2" BSP or NPT female thread

用于模具侧的SMI212固定组合板(参见117、118和119)

For SMI212 fixed multi-coupling plates on mould base
(see § 117、118and119)




组合板
SMI

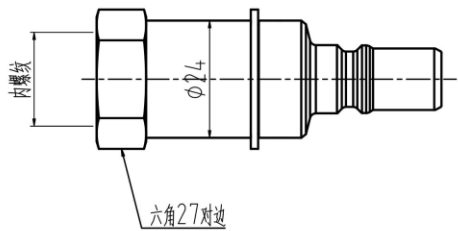

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI12	G1/2内螺纹,不带阀	SMI12.4103
	NPT1/2内螺纹,不带阀	SMI12.4203
	G1/2内螺纹,带阀	SMI12.5103/JV
	NPT1/2内螺纹,带阀	SMI12.5203/JV


90° 弯头配内径16mm软管-外螺纹1/2" BSP
90° elbows for flexible hose with 16 mm inside ϕ -male 1/2" BSP

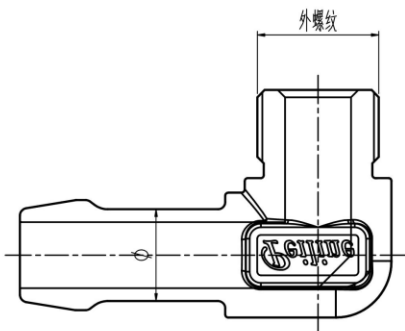

型号 Mould	规格描述 Specification description	零件号 Part-number
AF	G3/8外螺纹, $\Phi=16\text{mm}$	AF153.16/RE
	NPT3/8外螺纹, $\Phi=16\text{mm}$	AF253.16/RE

延长接头1/2" BSP-母1/2" BSP
Extenders male 1/2" BSP-female 1/2" BSP


组合板
SMI

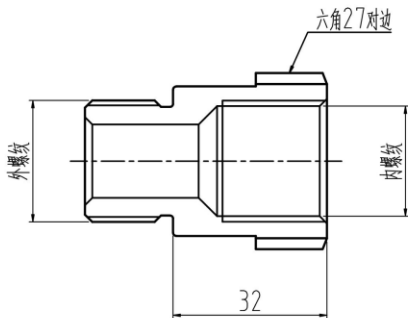

型号 Mould	规格描述 Specification description	零件号 Part-number
RMF	G1/2外螺纹-G1/2内螺纹	RMF153.103/LN
	NPT1/2外螺纹-NPT1/2内螺纹	RMF253.203/LN

SMI212组合板固定挂具
Support plate SMI212

用于带有12或20个插座的SMI212移动式组合板
For SMI212 mobile multi-coupling plates with 12or20 Sockets

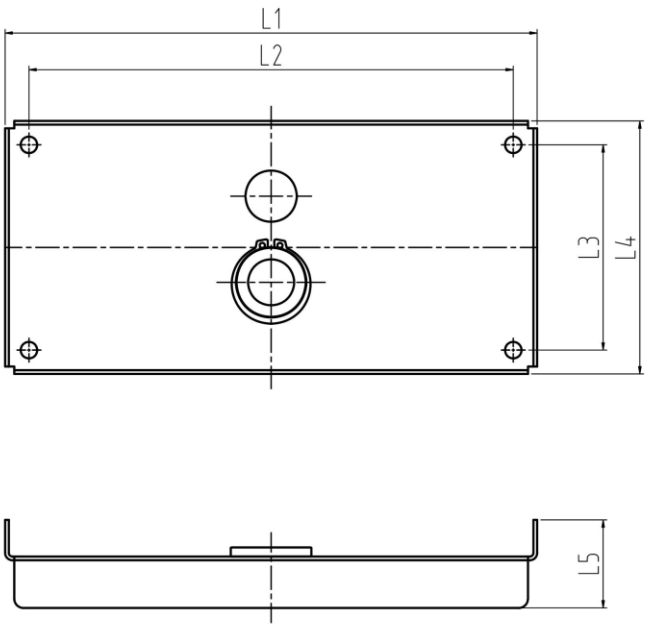

组合板
SMI

(1) 4bores M8-6H

型号 Mould	尺寸 Dimensions(mm)					零件号 Part-number
	L1	L2	L3	L4	L5	
SMI212	232	217	95	118	68	SMI212.12.8900
	291	264	138	130	68	SMI212.20.1090


SMI216多接头组合板(SMI216 Multi-joints)

12个接头(6个回路)
12 joints (6 circuits)


设备侧
Press side

SMI216移动组合板
SMI216 mobile multi-coupling plates on press side

装有12个SMI16关断插座(6个回路)，用于 ϕ 软管内径19 mm
Fitted with 12 SMI16 shut-off sockets (6 circuits) for 19 mm
inside ϕ hose connection


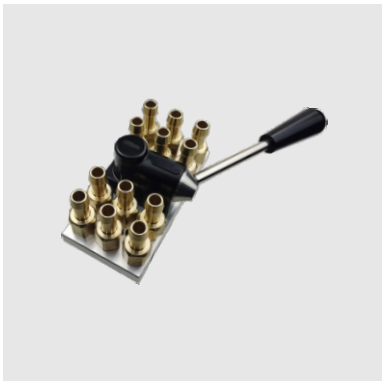


组合板
SMI

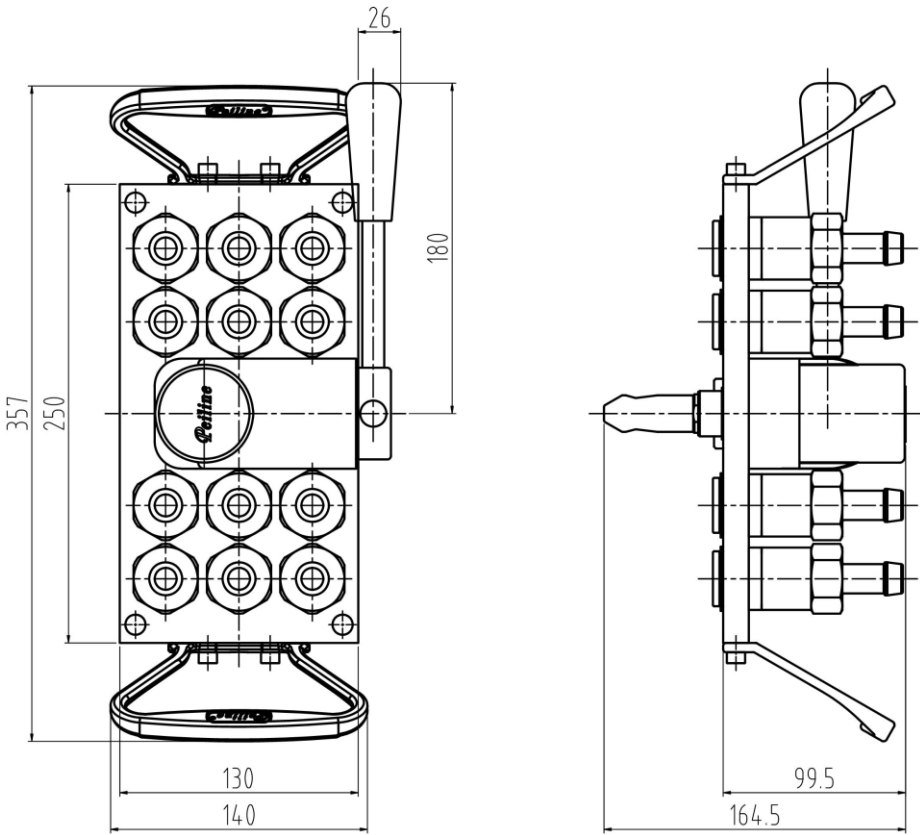

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI216.12	配备12个，SMI16 19mm内径软管插座	SMI216.12.1819/JV



配备12个SMI16单向阀插座，带3/4" BSP或NPT内螺纹
Fitted with 12 SMI16 shut-off sockets threaded 3/4" BSP or NPT female

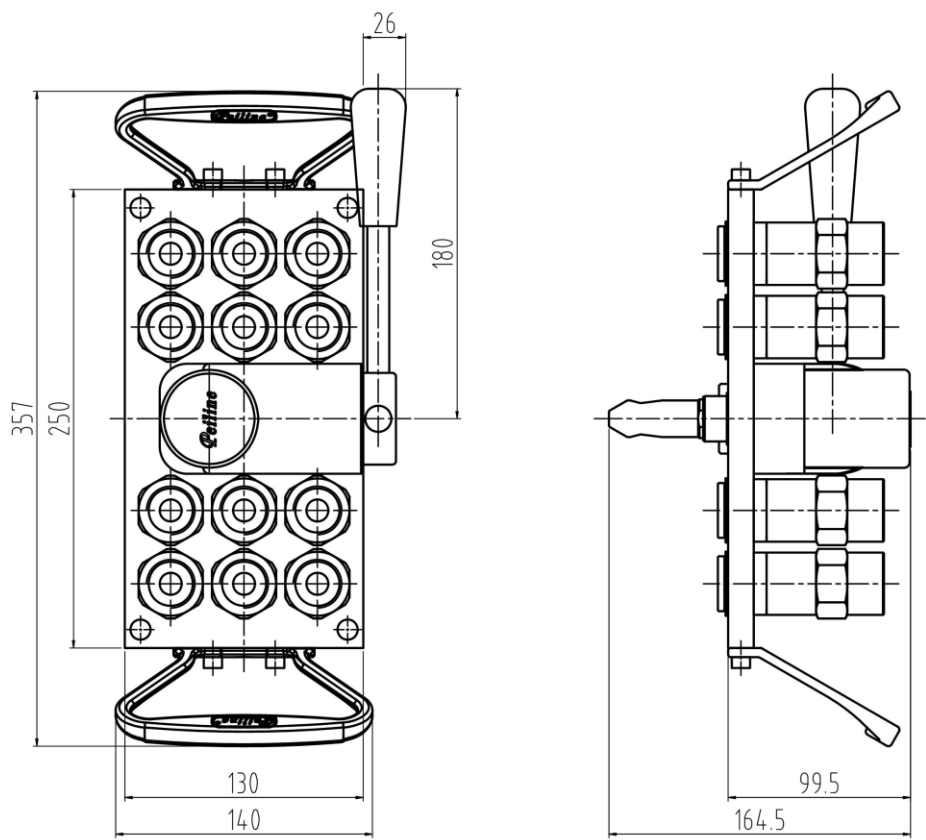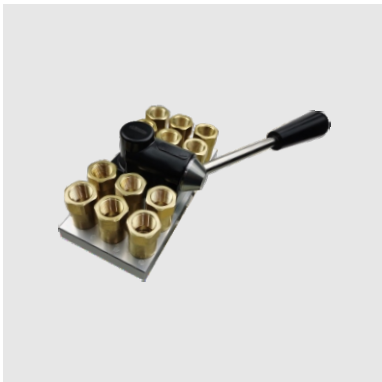

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI216.12	G3/4内螺纹	SMI216.12.1104/JV
	NPT3/4内螺纹	SMI216.12.1204/JV

装有10个SMI16单向阀插座(5个回路)，用于 ϕ 软管内径19 mm
Fitted with 10 SMI16 shut-off sockets (5 circuits) for 19 mm
inside ϕ hose connection

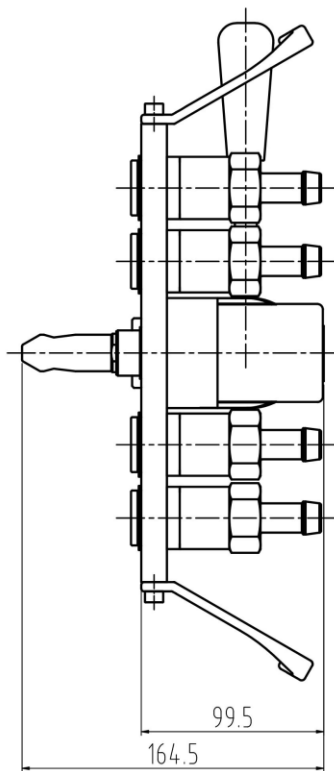
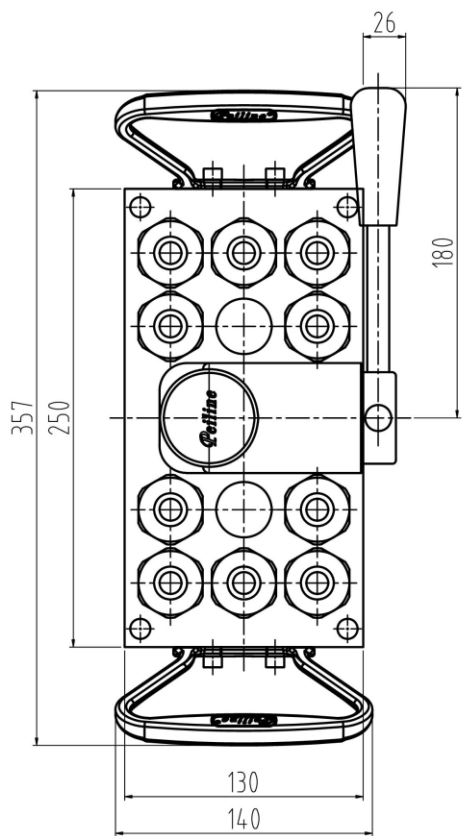


组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI216.10	配备10个，SMI16 19mm内径软管插座	SMI216.10.1819/JV

配备10个SMI16单向阀插座(5个回路)，带3/4" BSP或NPT内螺纹

Fitted with 10 SMI16 shut-off sockets (5 circuits) threaded 3/4" BSP or NPT female

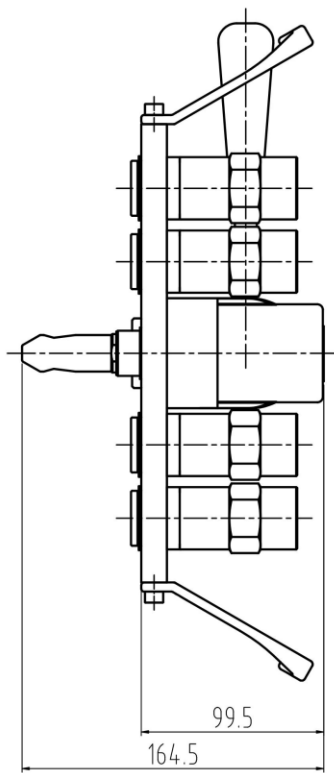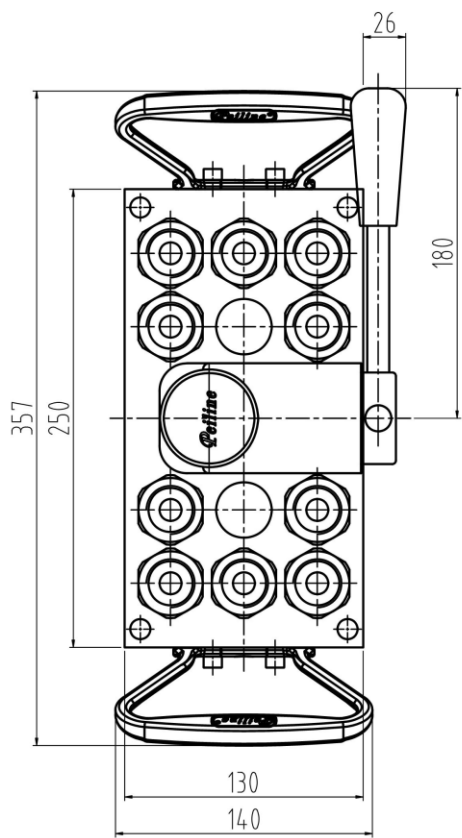

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI216.10	G3/4内螺纹	SMI216.10.1104/JV
	NPT3/4内螺纹	SMI216.10.1204/JV


模具侧
Mould side

SMI216模具侧固定组合板
SMI216 fixed multi-coupling plates on mould side

装有12个SMI16插头(6个回路)
Fitted with 12 SMI16 plugs (6 circuits)

固定板，配有4个管状支腿和2个90° 弯头
Fixed plates supplied with 4 tubular legs and 2 90° elbows

3/4" BSP或NPT内螺纹侧连接
3/4" BSP or NPT femal thread side connections


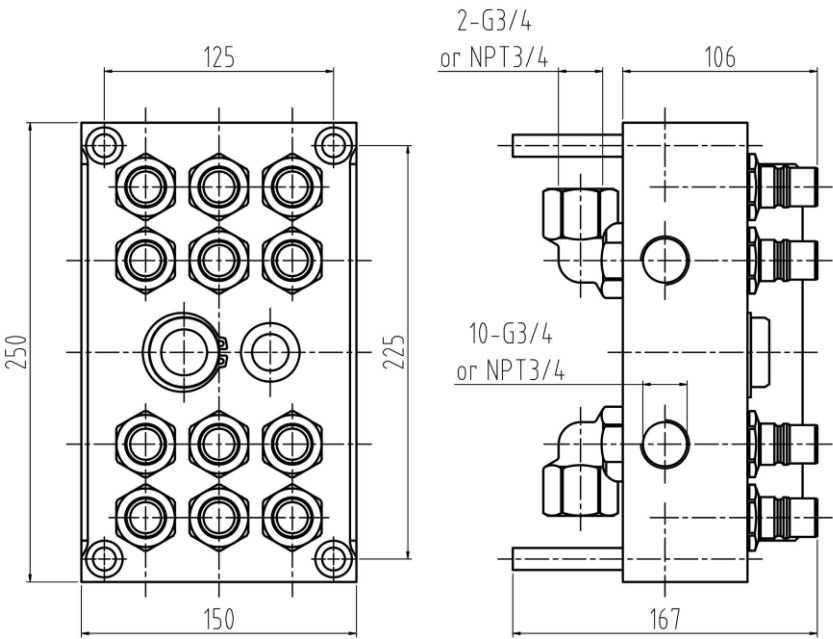


组合板
SMI

型号 Mould	规格描述 Specification description		零件号 Part-number
	输出端	接头型号	
SMI216.12	G3/4	不带阀	SMI216.12.6104
	NPT3/4	不带阀	SMI216.12.6204
	G3/4	带阀	SMI216.12.7104/JV
	NPT3/4	带阀	SMI216.12.7204/JV

最多可接收12个SMI16插头(6个回路)
Will receive upto 12 SMI16 plugs (6 circuits)

配有4个管状支腿和锁紧系统的固定板
Fixed plates supplied with 4 tubular legs and locking system

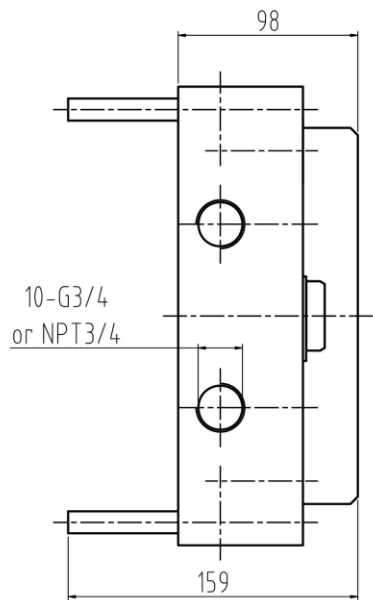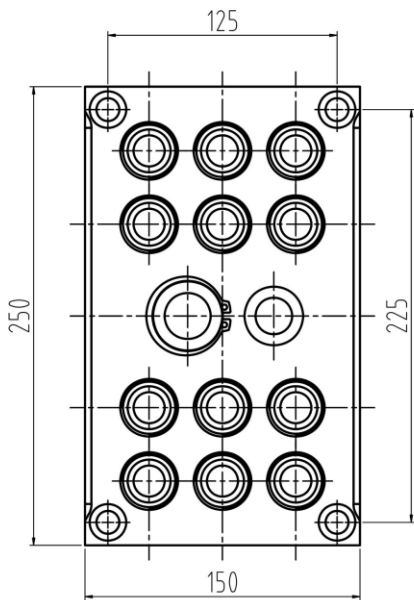

组合板
SMI

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI216.12	带12个G3/4螺纹	SMI216.12.6000
	带12个NPT3/4螺纹	SMI216.12.6200

内置SMI16关断插座连接内径16mm或19mm的软管


Built-in SMI16 shut-off sockets for 16mm or 19mm inside ϕ hose connection

用于SMI216移动组合板（参见125和127）

Fitting on SMI216 mobile multi-coupling plates for press side (see § 125 and 127)



组合板
SMI

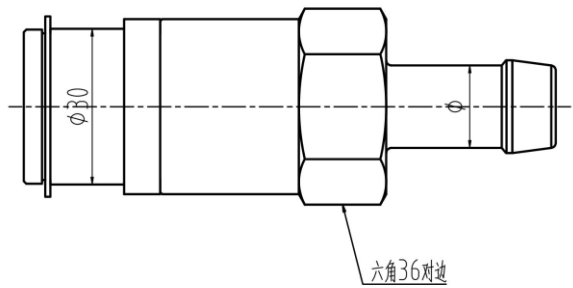


型号 Mould	规格描述 Specification description	零件号 Part-number
SMI16	连接16mm内径软管	SMI16.2816/JV
	连接19mm内径软管	SMI16.2819/JV

内置SMI16单向阀插座，带3/4"BSP或NPT内螺纹

Built-in SMI16 shut-off sockets with 3/4"BSP or NPT female thread

用于SMI216移动组合板(参见126和128)

Fitting on SMI216 mobile multi-coupling plates for press side
(see § 126 and 128)

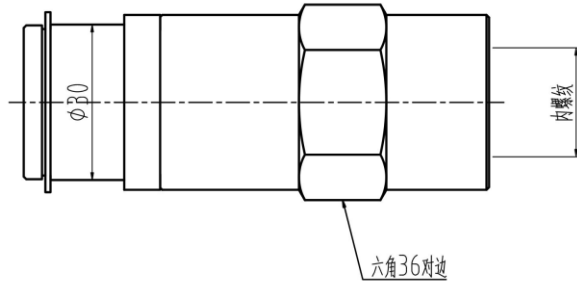

型号 Mould	规格描述 Specification description	零件号 Part-number
SMI16	G3/4内螺纹	SMI16.2104/JV
	NPT3/4内螺纹	SMI16.2204/JV


90° 弯头

90° elbows

组合板
SMI

外3/4"BSP -内3/4"BSP 用于模具底座上的SMI216固定组合板


male 3/4"BSP-female 3/4"BSP for SMI216 fixed multi-coupling plates
on mould base

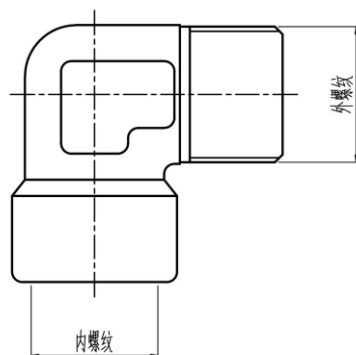


型号 Mould	规格描述 Specification description	零件号 Part-number
RMF	G3/4外螺纹-G3/4内螺纹,90°弯头	RMF154.104/LN

SMI216组合板固定挂具
Support plate SMI216

用于带有12个插座的SMI216移动式组合板
For SMI216 mobile multi-coupling plates with 12 Sockets

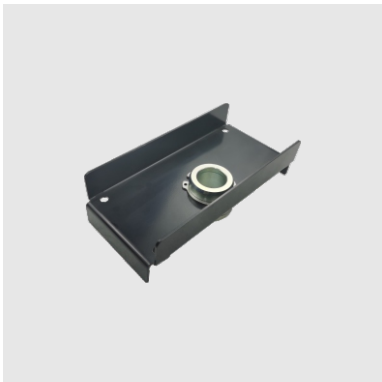

组合板
SMI

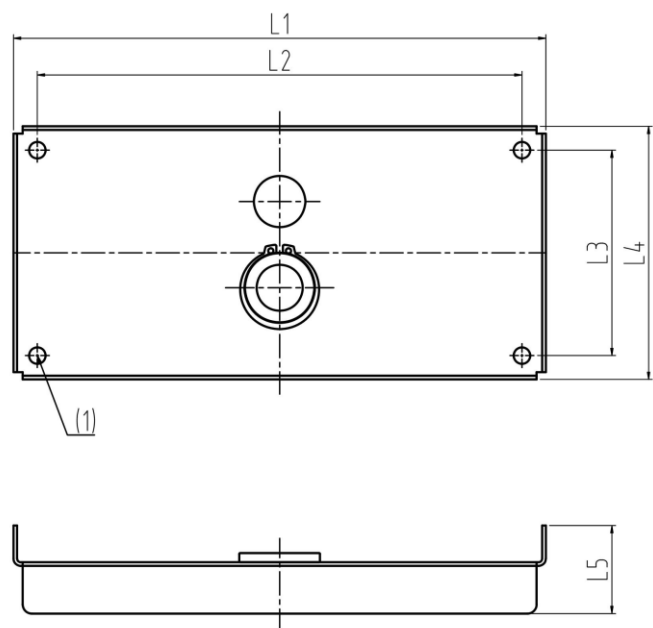

(1) 4bores M12-6H

型号 Mould	尺寸 Dimensions(mm)					零件号 Part-number
	L1	L2	L3	L4	L5	
SMI216	300	275	110	138	80	SMI216.12.8900

Peiline®



- 1、产品最终尺寸和外观以实样为准。
Final dimension and apperance subject to actual product.
- 2、任何产品技术与工艺上的改进不能及时通知到你，敬请谅解。
We appreciate your understanding to us in case of some technology and product process improvements not inform you in time.

浙江樂樂智能流体科技有限公司

ZHEJIANG SHENSHEN INTELLINGEN TFLUID TECHNOLOGY CO.,LTD

诸暨爱克圣兰模具有限公司

ZHUJI EXCELLENT MOULD CO.,LTD

地址：浙江省诸暨市兴农路9号友地智能视觉产业园28幢A座

Add: Building A, No.28, UD Intelligent Vision Industrial Park.

No.9. Xinong Road.Zhuji City. Zhejiang. China

Tel: 0575-87958839

Fax: 0575-87958837

Mail: hzpeilin@126.com

hzaksl@126.com

Web: www.peiline.com