

Peiline®



粵粵智能流体科技

ShenShen Intelligent Fluid Technology

标准式样 SCG
standard style



SCG03 06 09 12

插座与插头/Sockets and plugs



应用领域/Application area

SCG

无滴漏技术，保证设备的洁净和安全
采用SCG系列快速连接器，当回路断开时即可实现自动密封：
1、无流体泄露，不会污染环境
2、适用于电气和高电压环境

No drip technology to ensure the cleanliness and safety of the equipment
With SCG series fast connector, when the circuit is broken, it can be sealed automatically:
1, no fluid leakage, will not pollute the environment
2, suitable for electrical and high voltage environment

技术特点/technical characteristics

型号/Model	SCG03	SCG06	SCG09	SCG12
通径/Bore diameter	3	6	9	12
最高工作压力 Max. working pressure (bar)	16	16	16	16

工作温度/Working temperatures


密封材质 Sealing material	氟素橡胶FKM (JV) Fluorocarbon	三元乙丙橡胶EPDM (JE) Ethylene-Propylene	全氟橡胶FFKM (JKV) High fluorine rubber
使用温度 Service temperature	-30℃到+180℃	-10℃到+100℃	-20℃到+300℃

回路识别

红色或蓝色标志能够帮助操作员快速识别不同的回路 蓝色 /KB，红色 /KR	Red Or blue markings help the operator quickly identify different circuits Blue/KB, Red/KR
--	---

内螺纹的插座

Socket outlet with internal thread

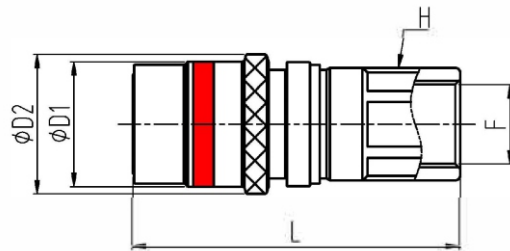


型号 Mould	尺寸 Dimensions(mm)								零件号 Part-number
	F	ΦD1	ΦD2	L	H				
SCG03	G1/8	18	15.7	47.3	13				SCG03.1100
SCG06	G1/4	24	27	62.1	20				SCG06.1101
SCG09	G3/8	28.3	32.6	63.2	26				SCG09.1102
SCG12	G1/2	43.5	48	100.7	36				SCG12.1103

SCG

外螺纹的插头

Male thread plugs



型号 Mould	尺寸 Dimensions(mm)								零件号 Part-number
	F	L	L1	H					
SCG03	G1/8	34.5	8	14					SCG03.7150
SCG06	G1/4	49.5	11	17					SCG06.7151
SCG09	G1/2	61	13	27					SCG09.7153
SCG12	G3/4	74.5	16	32					SCG12.7154

Peiline®



- 1、产品最终尺寸和外观以实样为准。
Final dimension and apperance subject to actual product.
- 2、任何产品技术与工艺上的改进不能及时通知到你，敬请谅解。
We appreciate your understanding to us in case of some technology and product process improvements not inform you in time.

浙江樂樂智能流体科技有限公司

ZHEJIANG SHENSHEN INTELLINGEN TFLUID TECHNOLOGY CO.,LTD

诸暨爱克圣兰模具有限公司

ZHUJI EXCELLENT MOULD CO.,LTD

地址：浙江省诸暨市兴农路9号友地智能视觉产业园28幢A座

Add: Building A, No.28, UD Intelligent Vision Industrial Park.

No.9. Xinong Road.Zhuji City. Zhejiang. China

Tel: 0575-87958839

Fax: 0575-87958837

Mail: hzpeilin@126.com

hzaksl@126.com

Web: www.peiline.com